

PRODUCTS HANDBOOK



2 SERIES: 2.3 EFI



Model	2.3 EFI
Engine	Kohler EFI ECV749 - 2 cyl 747 cc
Emission Standard	Stage V and EPA/CARB Phase III
Power (Iso Gross) / Torque	26,5 HP / 55,5 Nm @ 2600 rpm
Fuel	Petrol
Transmission	Hydrostatic
Drive speed (max.) (1)	15 km/h
Aux. hydraulics oil flow	42 l/min
Max. lifting height	1,6 m
Tipping load, max. (²)	700 kg
Lifting capacity straight, max. (3)	560 kg
Breakout force / 50 cm (19.7 in)	840 kg
Pushing force (c)	770 kgf
Average ground pressure (w/standard tires)	583 kg/m²
Turning radius: inside/outside	700/1698 mm
Standard tires (Tractor profile)	20x8.00-10
Weight	710 kg
Product Code	C951028

⁽¹) Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

4 - 5 SERIES: 4.2 K - 5.2 K



Model	4.2 K	5.2 K
Engine	Kubota D722 - 3 cyl 719 cc.	Kubota D902 - 3 cyl 898 cc.
Emission Standard	Stage V and	Tier 4 Final
Power (Iso Gross) / Torque	20 HP / 45.8 Nm @ 2600 rpm	25 HP / 55 Nm @ 2400 rpm
Fuel	Die	sel
Transmission	Hydro	static
Drive speed (max.) (1)	14 km/h	
Aux. hydraulics oil flow	36 l/min	
Max. lifting height	2,75 m	
Tipping load, max. (2)	1100 kg	1110 kg
Lifting capacity straight, max. (3)	880 kg	890 kg
Breakout force / 50 cm (19.7 in)	800 kg	
Pushing force (c)	900 kgf	
Average ground pressure (w/standard tires)	878 kg/m²	905 kg/m²
Turning radius: inside/outside	890/1890 mn	n
Standard tires (Tractor profile)	23x8.	50-12
Weight	990 kg	1020 kg
Product Code	C944001	C977017

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

5 SERIES: 5.3 K



Model	5.3 K
Engine	Kubota D1305, 3 cyl 1261 cc.
Emission Standard	Stage V and Tier 4 Final
Power (Iso Gross) / Torque	25 HP / 85 Nm @ 1700 rpm
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.) (1)	12,5 km/h
Aux. hydraulics oil flow	50 l/min
Max. lifting height	2,75 m
Tipping load, max. (2)	1290 kg
Lifting capacity straight, max. (3)	1030 kg
Breakout force / 50 cm (19.7 in)	800 kg
Pushing force (c)	900 kgf
Average ground pressure (w/standard tires)	854 kg/m²
Turning radius: inside/outside	800/2000 mm
Standard tires (Tractor profile)	23x10.50-12
Weight	1070 kg
Product Code	C977038

^{(&#}x27;) Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

6 SERIES: 6.3+ K



Model	6.3+ K
Engine	Kubota D1305 - 3 cylinder - 1261 cc.
Emission Standard	Stage V and Tier 4 Final
Power (Iso Gross) / Torque	25 HP / 85 Nm @ 1700 rpm
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.) (1)	9 km/h
Aux. hydraulics oil flow	50 l/min
Max. lifting height	2,92 m
Tipping load, max. (2)	1400 kg
Lifting capacity straight, max. (3)	1120 kg
Breakout force / 50 cm	1400 kg
Pushing force (c)	1690 kgf
Average ground pressure (w/standard tires)	1022 kg/m²
Turning radius: inside/outside	905/2020 mm
Standard tires (Tractor profile)	23X8.50-12
Weight	1400 kg
Product Code	C961015

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

7 SERIES: 7.2 K



Model	7.2 K
Engine	Kubota D1305 - 3 cylinder - 1261 cc.
Emission Standard	Stage V and Tier 4 Final
Power (Iso Gross) / Torque	25 HP / 85 Nm @ 1700 rpm
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.) (1)	9 km/h
Aux. hydraulics oil flow	40 l/min
Max. lifting height	2,90 m
Tipping load, max. (2)	1725 kg
Lifting capacity straight, max. (3)	1380 kg
Breakout force / 50 cm	1700 kg
Pushing force (c)	1690 kgf
Average ground pressure (w/standard tires)	1099 kg/m²
Turning radius: inside/outside	825/2090 mm
Standard tires (Tractor profile)	23X10.50-12
Weight	1590 kg
Product Code	C962025

⁽¹) Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments. (²) Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

8 SERIES: 8.4S K



Model	8.4S K STAGE IIIA	
Engine	Kubota V1505 - 4	cylinder - 1498 cc
Emission Standards	Stage IIIA	
Power (Iso Gross) / Torque	37.5 HP / 97 Nm @ 2000 rpm	
Fuel	Die	esel
Transmission	Hydrostation	c OneDrive
Drive speed (max.) (1)	13 - 26 km/h	
Aux. hydraulics oil flow	67 l/min	
Max. lifting height	2,98 m	
Tipping load, max. (2)	1840 kg	
Lifting capacity straight, max. (3)	1470 kg	
Breakout force / 50 cm	1700 kg	
Pushing force (c)	2050 kgf	
Average ground pressure (w/std tires)	1025 kg/m²	
Turning radius: inside/outside	825/2090 mm	
Standard tires (Tractor profile)	26X12	2.00-12
Weight	1680 kg	
Product Code	C963030	

⁽¹) Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

8 SERIES: 8.5 Y



Model	8.5 Y
Engine	Yanmar 4TNV88 - 4 cylinder - 2190 cc
Emission Standards	Stage IIIA
Power (Iso Gross) / Torque	50 HP / 140 Nm @ 1200 rpm
Fuel	Diesel
Transmission	Hydrostatic OneDrive
Drive speed (max.) (1)	16 km/h
Aux. hydraulics oil flow	85 l/min
Max. lifting height	3,2 m
Tipping load, max. (2)	2050 kg
Lifting capacity straight, max. (3)	1640 kg
Breakout force / 50 cm	1700 kg
Pushing force (c)	2190 kgf
Average ground pressure (w/std tires)	868 kg/m²
Turning radius: inside/outside	670/2245 mm
Standard tires (Tractor profile)	26x12.00-12
Weight	1750 kg
Product Code	C964030

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.
(3) Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

3,7

11 SERIES: 11.5 Y





ACI ATTACHMENT CONTROL **INTERFACE**

Model	11.5 Y
Engine	Yanmar 4TNV88 - 4 cylinder - 2190 cc
Emission Standard	Stage IIIA
Power (Iso Gross) / Torque	50 HP / 140 Nm @ 1200 rpm
Fuel	Diesel
Transmission	Hydrostatic OneDrive
Drive speed (max.) - 2 speed (1)	12-25 km/h
Aux. hydraulics oil flow	85 l/min
Max. lifting height	3,7 m
Tipping load, max. (²)	3180 kg
Lifting capacity straight, max. (3)	2540 kg
Breakout force / 50 cm	3000 kg
Pushing force (c)	2650 kgf
Average ground pressure (w/standard tires)	915 kg/m²
Turning radius: inside/outside	1135/2635 mm
Standard tires (Tractor profile)	400/50-15
Weight	2280 kg
Product Code	C968000

⁽¹) Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included. Note: Refer to the Operator's manual for the comprehensive load diagram.

EZ SERIES: EZ8




Model	EZ 8
Transmission	Hydrostatic
Drive speed (max.) (1)	12 km/h
Aux. hydraulics oil flow	35 l/min
Max. lifting height	2,90 m
Tipping load, max. (2)	1780 kg
Lifting capacity straight, max. (3)	1420 kg
Breakout force / 50 cm	1700 kg)
Pushing force (c)	2050 kgf
Average ground pressure (w/standard tires)	958 kg/m²
Turning radius: inside/outside	825/2090 mm
Standard tires (Tractor profile)	26X12.00-12
Weight	1570 kg
Product Code	C963020

- (1) Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.
- $(^2)$ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.
- (3) Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.
- (4) The operation time of machine varies highly depending on the type of work it is performing.

Note: Refer to the Operator's manual for the comprehensive load diagram.

Electric system and b	attery
Battery type	Lithium-ion
Battery capacity	20,5 kWh
Electric motors	2
Charging system	Integrated charger
Charger type	Sealed single-phase
Charger Input Voltage	110 - 230 ± 10% VAC
Charger Input Frequency	50 ÷ 60 Hz
Charger Absorbed Current	Max. 14 A
Charging Current (230 VAC)	Max. 60 A
Charging Current (120 VAC)	Max. 30 A
Charger plug type	Schuko, CEE 7/7
Charger Protection	Output short-circuit, Inverse polarity
Charger Operating temp.	- 30° to + 70° C

Daily work cycle in hours (4)

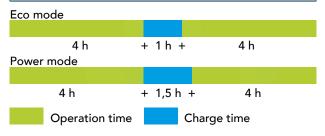





UNBREAKABLE BODY PANELS

The resistance and flexibility of the compound used let the panel absorb shocks, deforms and go back to original shape.


1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



AIR CONDITIONING SYSTEM WITH HEATING FOR CAB

Air conditioning system from the roof of the cabin, with adjustable fan speed and electronic temperature control. Wide air outlets create a very comfortable ventilation system inside the cabin.

|--|



FLOATING BOOM VALVE

It allows the mounted attachments to follow the contours of the land perfectly. Ideal for applications in agriculture and in the care of the green areas. Note: Self-leveling is disabled when the boom floating is turned on.

	1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series
--	----------	----------	----------	----------	----------	----------	----------	----------	-----------	-----------	-----------



FULLY ENCLOSED CAB WITH SOUND INSULATION LINEN

With weatherproof blue tinted glass, is the optimal solution for driver protection from cold, wet, wind and winter. The large door enables ease of access, whilst the side glass is hinged to open for ventilation. It's standard equipped with wiper. Heating system is suggested (come standard on 2 series cab).

 20100	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



"SMART" CABIN

The most competitive solution for the operator who wants to improve working conditions thanks to a light cabin which limits the discomfort created by weathering.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



WARNING AND SAFETY LIGHTS FOR ROAD TRAVEL (W/ MIRRORS)

Front and rear lights, brake lights, turning lights, beacon, mirrors. In certain countries this equipment enables road traffic registration – requirements vary in different countries, please consult your local MultiOne distributor.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



TRAILER COUPLING / 2" HITCH RECEIVER

Two type of trailer coupling: A) rear tow hook with double connection: with tow ball (car type) and tow pin (agricultural type). B) 2" Hitch receveir. Can be used also with rear weights.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



REAR WEIGHTS 220 KG + 220 KG (485 LBS + 485 LBS)

Rear weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



REAR WEIGHTS 90 KG + 90 KG (198 LBS + 198 LBS)

Rear weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



REAR SIDE WEIGHTS 40 KG + 40 KG (88 LBS + 88 LBS)

Rear side weights are used to increase the lifting capacity of the machine. It's possibile to mount them also with other rear weights mounted. Two kit (80 kg per side, 160 kg total) can be mounted.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



Optional

Not available



DYNAMIC BLOCK SYSTEM

The DBS diverts oil flow between the left & right side hydraulic wheel motors: the hydraulic oil flows in parallel between the hydraulic wheel motors on each side operating similar to a differential lock.

1 Serie 2 Serie 5 Serie 6 Serie 7 Serie 9 Serie 11 Seri	es es es es ries ries ries
---	----------------------------



TOROUE DIVIDER

It evenly distributes hydraulic oil between the front right and front left side hydraulic motors, improving traction on slippery and uneven surfaces.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	8.5 ∀	9 Series	10 Series	11 Series	11.5 Y	EZ Series



HYDRAULIC MULTICONNECTOR

It is a innovative coupling system for front attachments that allow the connection of the hydraulic lines in a few seconds without stress.

	1 Serie 2 Serie	4 Serie	5 Serie	6 Serie	7 Series	8 Series	9 Series	10 Serie	11 Serie	EZ Serie
--	--------------------	---------	---------	---------	----------	----------	----------	----------	----------	----------



LEFT PROTECTION BAR FOR OPERATOR

It is placed on the left side of the machine to protect the operator from falling out of the vehicle. It can be locked and unlocked very quickly thanks to a special mechanism.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Serie



REAR HYDRAULIC OUTLETS

They are used to mount on the rear side attachments that need hydraulic supply. The rear outlets are controlled by the control panel.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



Not available



AUTOMATIC LOCKING/UNLOCKING PLATE

On the automatic attachment plate the locking pins move hydraulically and are operated from cockpit.

This way the driver can stay on the seat when coupling and disconnecting non-hydraulic attachments.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series
----------	----------	----------	----------	----------	----------	----------	----------	-----------	-----------	-----------



ATTACHMENT COUPLING PLATE FOR REAR MOUNTING

It is used to assemble attachments on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



REAR 12V ELECTRIC SOCKET

12 Volt rear electric socket to connect the attachments.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series
----------	----------	----------	----------	----------	----------	----------	----------	-----------	-----------	-----------



TIE DOWN BRACKET ON WHEEL HUB

The tie down brackets mounted on wheel hub makes easier to tie down the machine on a trailer.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



WHEEL SPACER KIT

Wheel spacers are used to make the machine wider and increase its stability.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



Optional


Not available



CRUISE CONTROL

OneDrive hydrostatic transmission allows to set and easily change speed for outstanding control. The machine speed is rock-solid.


|--|



BACKUP WARNING BEEPER

It help keep everyone safer during MultiOne machine operation.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



SKID-STEER ATTACHMENT ADAPTER PLATE

Coupling adapter suitable to mount skid steer attachments on MultiOne mini loader.

- 1 CODE: C890023 MT skid steer attachment adapter plate 2 CODE: C880230 Mini skid steer attachment adapter plate

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



FLAT FACE COUPLING KIT

Adaptor to be put on the multiconnector, in order to connect standard flat face connections.



BEACON LIGHT

Orange beacon light mounted on the top of the cab's roof.

- 7 4 6 0 V 8 0 <u>+ </u>	1 Ser	2 Ser	4 Ser	5 Ser	6 Ser	7 Ser	8 Ser	9 Ser	10 Se	11 Se	EZ Se
---	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------





MULTI-FUNCTIONS JOYSTICK

The multi-function electronic joystick allows an easy and precise control of the boom and attachments.

1 Series	2 Series	4 Series	5.2 K	5.3 K	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



ACI (ATTACHMENTS CONTROL INTERFACE)

ACI system allows the driver to control the attachments movements without the need for separate control boxes, cables or additional wiring. The connection to the attachments is made by a 7-poles socket.

1 Series	2 Series	4 Series	5.2 K	5.3 K	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



RUBBER TRACKS

Track drive grant maximum stability & traction, with minimal ground damage and low ground bearing pressure. The large contact area under the tracks reduces pressure, minimises ground damage and avoids sinking into soft soil & creating ruts. (Kit weight 750 kg/1655 lbs)

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	11 Series	EZ Series



REAR BULL BAR

It protects the rear side of the machine in case of shocks. With side extensions from 7 series on.

	1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Serie	11 Serie	EZ Serie
--	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------



ONE DRIVE

OneDrive is a brand new transmission system with a performance output over 30% higher than standard circuit.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	8.55 K STAGE III	9 Series	10 Series	11 Series	Serie EZ

NEW GENERAL BUCKET



FEATURES & BENEFITS

- New efficient design increases volume and visibility
- Bolt-on Teeth and Cutting edge available
- · Heavy duty (HD) models available for hard works

The new design of the MultiOne bucket increases the volume and enables good visibility. The inside of the bucket is completely plain and the sides open forward in slight angle which guarantees easy and complete filling and empting of all kinds of materials. There are narrow holes at the upper end of the bucket which improve visibility and prevent stones from falling towards the operator. The special design allows to stack the buckets one inside the other saving storage space (until 6 on a pallet). Available with cutting edge and teeth.

Model	Volume*	Width (A)	Length (B)	Height (C)	Weight	Teeth	Code
115	238 I (8.4 ft ³)	115 cm (45.3 in)	58 cm (22.8 in)	59 cm (23.2 in)	74 kg (163 lbs)	6	C890032
130	272 l (9.6 ft ³)	130 cm (51.2 in)	58 cm (22.8 in)	59 cm (23.2 in)	82 kg (181 lbs)	7	C890033
130HD	272 l (9.6 ft ³)	130 cm (51.2 in)	58 cm (22.8 in)	59 cm (23.2 in)	130 kg (287 lbs)	7	C890034
150HD	316 l (11.2 ft ³)	150 cm (59 in)	58 cm (22.8 in)	59 cm (23.2 in)	146 kg (322 lbs)	8	C890035
180HD	383 I (13.5 ft ³)	180 cm (71 in)	58 cm (22.8 in)	59 cm (23.2 in)	170 kg (375 lbs)	10	C890036

(*) verify the lifting capacity of the n	nachine															
Accessories																
												V	Veight	:	Cod	de
Tooth												1,7 k	g (3.7	lbs) (C890	007
Bolt-on cutting edge						115		130	/130	HD	1	50HE)		180HI)
Code					C8 ⁹	9003	8	C8	9003	39	C8	3900	40	C	8900	41
Compatibility					かジジ	<i>6</i> .	√,5	8,4	800 is	dp	102	6.351	13/3	9/551)	12.X	
Model																
115																
130 / 130HD																
150HD																
180HD																
(*) C890025 adapter required							Very	, compat	ible		Compa	atible		Not	compatib	le

LEVELLING BUCKET



- · Excellent visibility to the edge of the bucket
- Sharp back edge enables exact levelling when driving backward
- Heavy Duty construction
- Strong cutting edge made of high tensile, abrasion resistant wear steel

The MultiOne levelling bucket has a sharp back edge which makes levelling easy when driving backward. Low rise design and a long bottom gives excellent visibility to the front edge of the bucket. This also makes levelling easier. The levelling bucket is strong and completely plain inside, which makes the filling and emptying easy. It is an ideal tool to levelling gravel and soils for landscaping and gardening projects.

Model	Volume*	Width (A)	Length (B)	Height (C)	Weight	Code
140	244 l (8.6 ft ³)	141 cm (55.5 in)	79 cm (31.1 in)	46 cm (18.1 in)	150 kg (331 lbs)	C890042
160	282 l (10 ft ³)	161 cm (63.4 in)	79 cm (31.1 in)	46 cm (18.1 in)	170 kg (375 lbs)	C890043

^(*) verify the lifting capacity of the machine

					, ⁷ 3				~ ∕ >.		<i>\o</i>	-0	3	-0	.*	
Compatibility	√ .	J.,	NJ	47	<i>2</i> /1,7	6.3	رن	8/7	8,4	ďρ	1/1	6351	13/K21	طن رخي	15 V	€1
Model																
140																
160																

(*) C890025 adapter required Very compatible Compatible Not compatible

COMBO BUCKET



FEATURES & BENEFITS

- Heavy duty construction
- Two cylinders with hydraulic locking valve for load holding
- Increased dumping height
- Multiple functions: digging, dozing, grading, grappling, and dumping
- · Cutting edge designed for bolt on teeth

This multi-purpose bucket can be used for demolition, landscaping, and general construction work. When used as a grapple, the dual cylinders, equipped with load holding valves, provide a secure clamping force to pick stones, tree stumps etc... The bucket can be opened for fine grading. Another benefit of the opening bottom is that the bucket can be emptied at a higher level by opening the bottom instead of tipping the bucket edge down. Heavy duty steel construction includes a cutting edge that is designed for bolt-on teeth.

Model	Volume*	Width	Length	Height	Opening Angle	Weight	Teeth	Code
								C890075
130	310 l (11 ft ³)	130 cm (51.2 in)	81 cm (32 in)	65 cm (25.6 in)	75°	182 kg (401 lbs)	8	C890076
150	385 I (13.6 ft ³)	150 cm (59 in)	81 cm (32 in)	65 cm (25.6 in)	75°	198 kg (437 lbs)	9	C890077

^(*) verify the lifting capacity of the machine

Accessories																
												\ V	Veight	:	Cod	de
Tooth												1,7 k	g (3.7	lbs)	C890	007
Compatibility	\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.	گ _ن ي	₩.	€,	みがり	6.5	√°.	8,4	80 to	dp	22	6.551	13/30	d हेट्टी	2.x	₽
Model																
110																
130																
150																

() C890025 adapter required Very compatible Compatible Not compatible

GRAPPLE BUCKET



FEATURES & BENEFITS

- · Versatile bucket for handling of loose materials
- Heavy duty construction
- Easily controlled hydraulic grapple

Grapple bucket combines a normal bucket and a grapple and is therefore suitable for a multitude of jobs.

This bucket is ideally designed to dig and grab difficult material. Heavy duty steel bucket design, combined with the center mounted hydraulic cylinder and efficiently designed grapple teeth, enable this bucket to do multiple jobs, from loading and grading loose soils and materials, to grabbing and loading awkward materials. It can be used for transporting and loading of branches, wood chips, compost, straw, manure, construction waste etc. It can also be used as a normal bucket with the grapple in the upright position.

Model	Width		Le	ength		F	leight		Ope	ning A	Angle		Weig	ht		Code	•
110	110 cm (43.3	in)	67 cm	(26.4	in)	47 cr	n (18.	5 in)		84°		119	kg (2	62 lbs)	С	8900	65
130	130 cm (51.2	in)	67 cm	(26.4	in)	47 cr	n (18.	5 in)		84°		134	kg (29	95 lbs)	C	8900	66
Compa	tibility	^	ک _ن ی	₩J.	ئ ې	^{ري} رن	<u>ئ</u>	√ي. م	8,4	90, is	ďρ	10/	6.351	1399	a fish	√1,*	€Ì
Model																	
110																	
130	30																
(*) C890025 a	dapter required							Ver	y compati	ble		Compa	atible		Not	compatib	le

DEMOLITION GRAPPLE BUCKET



FEATURES & BENEFITS

- Move hard to handle materials easily
- Two hydraulic grapples easy to operate
- Handles bulky, uneven loads securely

This bucket is designed to handle bulky, irregularly shaped objects found in demolition, industrial, construction, recycling. Ideal for trunks, large rocks, bush, industrial and demolition scrap, and recycling debris. The two grapples are driven by two powerful hydraulic cylinders, this allows them to adapt optimally to the load to be lifted while maintaining a solid and secure grip.

Model		1	Width					W	eight				Co	ode	
130		130 c	:m (51	.2 in)			2	200 kg	(441	lbs)			C89	0067	,
150		150	cm (5	9 in)			2	220 kg	(485	lbs)			C89	0064	
Compatibility	k?	<i>₹</i>).	みジン	ې.	√,5	8,4	8,42	ďp	107	6350	13.Kg	9/350	√5' _¥	€J.	
Model															
130															
150															
(*) C890025 adapter required						Ver	compati	hle		Compa	atible		Not	compatib	le

NEW LIGHT MATERIAL BUCKET



FEATURES & BENEFITS

- · New efficient design increases volume and visibility
- Design to improve transport optimization
- Great resistance

The new design of the MultiOne bucket increases the volume and enables good visibility. The inside of the bucket is completely plain and the sides open forward in slight angle which guarantees easy and complete filling and empting of all kinds of materials. The special design allows to stack the buckets one inside the other saving storage space (until 6 on a pallet).

The bottom of a light material bucket is considerably longer and the sides are higher than on a general bucket, which speeds up the work a lot. High back of the bucket prevents material from falling over the rear edge and guarantees high volume.

	-	-				
Model	Volume*	Width	Length	Height	Weight	Code
115	455 l (16 ft ³)	116 cm (45.6 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	108 kg (238 lbs)	C890371
130	520 l (18.4 ft ³)	131 cm (51.5 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	117 kg (256 lbs)	C890372
150	605 I (21.4 ft ³)	151 cm (59.4 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	134 kg (295 lbs)	C890373
180	735 I (25.9 ft ³)	181 cm (71.2 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	156 kg (344 lbs)	C890374

(*) verify the lifting capacity of the machine

^^	<u>ئ</u> ى	NJ.	<i>₽</i> .}	^{ري} رې	لى. ئى	ر ئ	8,4	80.00 60.00	ďρ	102	6350	13/19	9/350	IJ.,	€1
	~.	V. 32	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	V, V3 KJ PJ	1, 53 My P.	1, 53 KJ PJ PJ	1	1, 53 KJ PJ PJ PJ PJ PS V3 PV	1, 5, by ey ey, by 1, by 4, by ey,	1, 53 KJ PJ PJ PJ PJ PS 13 PV PP	1, 53 PJ PJ PJ PJ PJ PJ PJ PP PJ PJ	1, 53 KJ PJ	1, 53 Ky 25, 55, 53 13 8V 82, 8P P2 12 P2	1 23 KJ 63 63 73 8X 86 15 06 19 63 18 18 18 18 18 18 18 18 18 18 18 18 18	

(*) C890025 adapter required Very compatible Compatible Not compatible

HIGH TIP BUCKET



FEATURES & BENEFITS

- Hydraulic operated
- Increased dump height (+ 60 cm / 24 in)
- Excellent volume

High tip bucket is the right choice when you need to reach higher and longer. The bucket is equipped with two hydraulic cylinders that push and tip the bucket over its front edge, which gives considerably more tipping height than with a normal bucket. Increase the dump height of the machine by almost 60 cm (24 in) using the high tip bucket. This increased reach enables loading high-side trucks without the need of a ramp. The bucket is an ideal tool for snow removal, loading of wood chips and for loading works on recycling plants etc. The bucket is available with a flat cutting edge.

Model	Volume*	Width	Length	Height	Weight	Code
100	210 l (8.1 ft ³)	100 cm (39.4 in)	86 cm (33.8 in)	61 cm (24 in)	154 kg (339 lbs)	C890090
130	280 l (9.9 ft ³)	130 cm (51.2 in)	86 cm (33.8 in)	61 cm (24 in)	174 kg (384 lbs)	C890092
150	320 l (11.3 ft ³)	150 cm (59 in)	86 cm (33.8 in)	61 cm (24 in)	188 kg (414 lbs)	C890093
180	380 l (13.4 ft ³)	180 cm (71 in)	86 cm (33.8 in)	61 cm (24 in)	208 kg (460 lbs)	C890094

(*) verify the lifting capacity of the machine

Compatibility	\?	<u>ئ</u> .	NJ.	45.5	かジブ	کئی	√,5	8 ^½	900 is	ďp	10,7	6.351	13,60	a issil	√5' _¥	€1
Model																
100																
130																
150																
180																

(*) C890025 adapter required Very compatible Compatible Not compatible

PALLET FORK



FEATURES & BENEFITS

- Must-have attachment
- Heavy duty construction
- · Easily adjustable forks width
- · Useful attachment on construction sites, farms, as well as on the company's yard doing material handling jobs

The pallet fork enables safe and quick handling of multiple sized pallets. The forks are forged from high strength steel, and are available in several lengths based on model size. The fork frame is designed to

Α

allow the width of the forks to be easily adjusted by as much as 1 m / 39 in (70 cm / 27.6 in on C895120). Optional bolt on back stop provides additional safety. MultiOne is an excellent machine for load handling thanks to the precise steering and drive control. Compared with a conventional forklift truck MultiOne is superior when working outdoors and on terrains, on all seasons.

Model	Forks Length (A)	Lifting Capacity⁵	Width	Weight	Code
Frame (without forks) ¹	/	up to 1200 kg (2646 lbs)	100 cm (39,4 in)	31 kg (68 lbs)	C890330
Frame HD (without forks) ²	/	up to 2000 kg (4408 lbs)	100 cm (39,4 in)	43 kg (95 lbs)	C890335
110 (forks pair) ³	110 cm (43.3 in)	1200 kg (2646 lbs)	/	68 kg (150 lbs)	C890332
120 (forks pair) ⁴	120 cm (47.3 in)	2000 kg (4408 lbs)	/	104 kg (230 lbs)	C890333

(¹) C890331 or C890332 required -	· (²) C89033	1 or C890)332 or C	890333 re	equired - () C89033	30 or C89	0335 requ	uired - (⁴)	C890335	required	- (°) verity	y the lifting	g capacity	of the ma	ichine
Optional (may be red	quired	by lav	v)													
Back stop												8 kg (17 lbs) (C890	312
•							-					1	60			1
Compatibility	^ :	گ ئ	ďΣ	⟨5 [,] }	0/1)	ل. رئ	√3.	8,14	80,0	ďρ	101	6.350	13/20	dizz	15.X	€1
Model																
80																
90																
110																
120																
(*) C890025 adapter required	•						Very	/ compat	ible		Compa	atible		Not	compatib	le

PALLET FORK HYDRAULIC CLAMP



FEATURES & BENEFITS

- A unique option for the pallet fork system
- Secures awkward loads to the forks
- Basic attachment for fencing and forest work
- Grabbing and transporting of stones and similar objects also possible

The hydraulic clamp attaches to the pallet fork frame, changing the pallet fork to a versatile grapple system. The hydraulically operated grapple secures loads awkward loads like logs, poles, large tubes, and more.

The grab is equipped with a powerful hydraulic cylinder. The hydraulic clamp assembly requires either a pallet fork (C890330 frame + forks - not included with the hydraulic clamp).

The back stop (C890312) can't be installed with the hydraulic clamp.

Model		N	lin. di to g	amete Irab	er N	/lax. d	iamet grab	er	•	ening igle		We	eight		Cod	de
Pallet Fork Hydraulic	: Clam	p 4	0 cm (15.7 ir	n) 9	90 cm (35.4 in)			90°			46 kg (102 lbs)			C890	585
Compatibility	^	J.3	₩.	₹ 5.}	や か う	ري. ري	ر _ي ن	8,1	80,62	ďρ	10,1	6.351	13/30	455	15 × 1	€1
(*) C890025 adapter required							Very	compat	ible		Compa	atible		No	t compatib	le

JIB CRANE, ONE-PIECE OR TELESCOPIC



FEATURES & BENEFITS

- Useful for great outreach and high lift
- · Safety hook included
- Compact for good visibility
- · Versatile lifting attachment for various load handling jobs

The MultiOne Jib Crane provides additional reach for lifting operations. The jib crane is available in either a one piece design or a hydraulically adjustable telescopic design. Each of these designs includes a heavy duty safety hook.

The one-piece jib crane is equipped with two connecting points, one at the tip of the boom and one 500 mm lower. The telescopic jib crane enables the load to be kept close to the machine and then extended

outwards for placement. The steplessly extending and retracting boom allows lifting to places that would otherwise be very hard to reach. Compact design with telescoping cylinder inside the boom and durable wear pads on the outer boom, makes work safe and easy.

The maximum lifting load varies according to the machine on which it is installed.

Model	Length	Structural capacity*	Weight	Code
One-piece	250 cm (98.4 in)	200 kg (440 lbs)	41 kg (90.4 lbs)	C890710
Telescopic	110+60 cm (43.3+23.6 in)	500 kg (1100 lbs)	85 kg (187.4 lbs)	C890712

(*) verify the lifting capacity of the machine

					. 3				5		20		مجار		*	
Compatibility	√.`	گ _ن ی	NJ.	₹.j.	2,15	ل رئ	√ئ	8,4	Pozzi	ďρ	17	6.350	1,5,6	disz	15 X	₹J
Model																
One-piece																
Telescopic																
(*) C800025 adapter required																

(*) C890025 adapter required Very compatible Compatible Not compatible

BIG BAG LIFTER



FEATURES & BENEFITS

- Simple and efficient
- Rounded anti-swing side bars

This attachment enables safe and efficient handling of the oversized product bags containing fertilizer, corn, wood pellets, briquettes, and other granular products.

The anti-sway side bars increase operating safety without damaging the bags.

The heavy-duty construction has been widely tested, proving to be strong, reliable and durable.

Model	Lifting Capacity*	Max Width	Lift Hook Height	Weight	Code
Big Bag Lifter	1200 kg (2645 lbs)	100 cm (39.4 in)	133 cm (52.4 in)	49 kg (108 lbs)	C890713

(*) verify the lifting capacity of the machine

Compatibility	\ ?	<u>ځ</u> .	Ϋ́Σ	<i>₹</i> .	ور رين	<i>6</i> ,2	رن	8,14	80.K	ďρ	107	6.351	13/19	वहंद्री	√3. _¥	♦
(*) C890025 adapter required							Very	compati	ble		Compa	ntible		Not	compatib	le

PALLET FORK WITH SIDE SHIFT



FEATURES & BENEFITS

- Safely controlled side shift from the driver's position
- · Designed to work in tight areas or along narrow aisles
- Different sizes of forks availables
- Back stop as standard

Hydraulically side shifting the forks enables easier and safer handling and loading of a wide variety of pallet sizes.

The forks can be moved to the left or to the right, making it possible to shift the load to the side of the machine - closer to a wall for example. This function can be operated from the driver's seat. The fork width is manually adjustable to adapt to different pallets size.

Pallet fork is equipped as standard with a back stop which enables handling of larger loads and protects the driver from falling objects. Different sizes of forks are availables.

Model	Forks Length	Lifting Capacity ³	Side Shift	Weight	Code
Frame (without forks) ¹	/	/	8,5 cm (3.4 in) to the left 8,5 cm (3.4 in) to the right	96 kg (212 lbs)	C890316
110 (forks pair) ²	110 cm (43.3 in)	1200 kg (2646 lbs)		68 kg (150 lbs)	C890332
120 (forks pair) ²	120 cm (47.3 in)	2000 kg (4408 lbs)		104 kg (230 lbs)	C890333

⁽¹⁾ C890331 or C890332 or C890333 required - (2) C890316 required - (3) verify the lifting capacity of the machine

Compatibility	\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.	J.,5	Ŋ.	<i>₽</i> .y	^{ري} رنځ	6,3	√.ÿ	8,4	900 j	dp	107	6.351	1390	d रहे	√2,×	€1
Model																
110																
120																
(*) C890025 adapter required	_						.,				0					

() C890025 adapter required Very compatible Compatible Not compatible

LIFTING TROLLEY



FEATURES & BENEFITS

- Designed to safely lift and handle heavier loads
- Made from heavy duty steel for reliability
- Excellent fork visibility
- Forks width adjustable

Compatibility

The MultiOne lifting trolley increases the lifting capacity of smaller models of MultiOne machines.

The lifting trolley is ideal for lifting and handling heavy pallets, oversized material bags, and other heavy materials. This unit can also be used to load and unload trucks and trailers.

The lifting trolley is equipped with foam filled rough terrain tires to allow all terrain materials transport. The fork width is manually adjustable to adapt to different pallets size.

Note: suggested floating boom valve on machine.

Model	Forks Length	Lifting Capacity*	Max Lifting Height	Height	Width	Weight	Code
Lifting Trolley	90 cm (35.4 in)	1000 kg (2204 lbs)	170 cm (67 in)	212 cm (83.5 in)	130 cm (51.2 in)	216 kg (476 lbs)	C890481
(*) verify the lifting capac	city of the machine						
			ر کی	5	<i>.</i> 0.	0 30 C	, ,

(*) C890025 adapter required Very compatible Compatible Not compatible

JOB SITE TOOLBOX



FEATURES & BENEFITS

- Spacious, lockable box for handheld tools
- Easy to lift and transport with MultiOne loader

This robust and versatile toolbox mounts on the attachment coupling plate can be transported with MultiOne loader to the worksite.

The lid is equipped with gas springs and can be locked with a padlock. The box is also equipped with lifting brackets for forklift.

The box keeps handheld tools in good order and is easy to lift into the back of a van or into a safe place for the night.

Model	Volu	me	١ ١	Vidth	(A)	Le	ength	(B)	Не	ight ((C)	٧	Veight		Cod	de
Job site Toolbox	618 l (2°	1.8 ft ³)	120	cm (4	7.2 in)	91 d	cm (35	.8 in)	81 cr	n (31.	9 in)	90 kg	g (198	lbs)	C890	920
Compatibility	~;	NJ.	47	かくび	6,5	√ي	8 ^j y	80, is	ďρ	10/1	6.351	13/31	d is just	12.K	♦	
(*) C890025 adapter required							Very	compati	ble		Comp	atible		Not	compatib	le

HEAVY DUTY SILAGE FORK



FEATURES & BENEFITS

- Heavy duty frame (except mod. 80)
- Versatile and efficient
- Replaceable teeth
- Compact model, which is well suited for silage distributing in small and confined places

The multi-purposed silage fork, in combination with the frame top hydraulic clamp, makes moving loose or baled silage safe and easy. The extra strength framework allows heavy loads, like round bales, to be safely and effectively moved. The lower fork teeth are easily removed and replaced when worn (except mod. 80).

Model		W	idth		Те	eth le	ngth		Nr. o	of teet	:h		Weig	ht		Cod	le
120	12	20 cm	(47.3	in)	60	cm (23	3.6 in)			8		110	kg (2	42 lbs) (C890	356
150	1	150 cm (59 in)			60	cm (23	3.6 in)			9		130	kg (2	87 lbs) (C890	357
	f					_				6				ري		Ι.	
Compatibility		√; √; √;		43.2	^{ر ک} رځ	P.5	√,5	8,4	80,0	ďρ	101	6.351	13,60	disp	15 j	€1	
Model		√; √3 [™] 5															
120																	
150																	
(*) C890025 adapter required								Ve	ry compat	ible		Compa	ntible		Not	compatib	le

MANURE FORK



FEATURES & BENEFITS

- Simple design
- Strong, replaceable teeth
- Designed for excellent visibility from the operator's seat

The manure fork is designed to easily handle loose materials like hay, straw, manure or animal bedding. The simple design promotes easy handling of manure. The strong teeth, made of high tensile forged steel, penetrate also into compacted manure and can carry a heavy load.

When worn, the fork teeth are quickly and easily replaced. Two models with different teeth lengths are available.

Model	'	Width	l	1	eeth	length	1	Nr.	of te	eth		We	ight			Code	
110	110 c	m (43	.3 in)	11	0 cm	(43.3 i	in)		10		85	5 kg (1	87.4	lbs)	C8	9038	31
Compatibility 💠 🂸			<u>ئ</u> .	ďΣ	⟨ ² ,}	<i>ئې</i> ن	لي.	المن	8.14	800 is	ďρ	201	6.351	13/19	97.55	√2, <u>*</u>	₹J
(*) C890025 adapter requ								Very	compati	ble		Compa	atible		Not	compatib	le

BALE HANDLER



FEATURES & BENEFITS

- Fast and easy way to load and transport bales
- Work perfectly with silage, hay and straw round bales, wrapped bales or unwrapped round bales.
- Adjustable fork wide
- Equipped with rear load support frame

Multione Round Bale Handler is an economical way to handle wrapped bales, without damaging the plastic wrapping. Distance between the forks can be adjusted manually. Bale handler is a good choice if the bales can always be handled sideways and don't need to be grabbed.

Model	Forks Length	Max load capacity*	Forks Width min/max	Weight	Code
Bale Handler	120 cm / 47.2 in	1000 kg (2204 lbs)	90 / 120 cm (35 / 47 in)	82 kg (180 lbs)	C890406

(*) verify the lifting capacity of the machine

Compatibility	^ ?	ڳ .	NJ.	45.	^{ري} رن مين	δ.	くぶ	8,4	9,4,2 6,2,42	ďp	207	6.351	13,150	d is a	12 × 1	€1
Round Bale Handler																
(*) C890025 adapter required					Very compatible						Compa	atible		Not	compatibl	le

HAY BALE GRAPPLE



FEATURES & BENEFITS

- Gently but firmly grabs round bales without damaging surface wrap
- · Automatically centers the load
- Versatile

This grapple is designed to safely and securely lift and move round hay bales up to 160 cm (5.25 ft) in diameter. The two hydraulically operated clamps provide a great grip over a wide surface area without damaging the bale wrap, and automatically center the load for safe and stable travel and handling. MultiOne machines with their telescopic boom can stack bales even at high heights.

Model	Max bale weight*	Min. Diameter for bale	Max. Diameter for bale	Weight	Code
Hay Bale Grapple	1000 kg (2204 lbs)	97 cm (38.2 in)	160 cm (63 in)	130 kg (287 lbs)	C890410

(*) verify the lifting capacity of the machine

Compatibility	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	گ _ن ی	Ŋ.	<i>₽</i> ,}	^{ري} رځ	<i>p.</i> ,	√,	8,4	900 j	dp	22	6.351	13,150	a रहेडी	√3' _¥	
(*) C890025 adapter required							1/		1.1.		0	49.1.		NI-4		

() Co90025 adapter required Very compatible Compatible Not compatible

BALE FORK



FEATURES & BENEFITS

- Easy and economical way to lift and transport bales
- Two models: 2 or 3 teeth
- Strong, replaceable teeth

Designed to carry any kind of bales, round or square.

The load balancing spikes are bolted into the fork body, making them easily replaceable. It is the ideal accessory for gathering hay bales in the field and loading them on trailers. Moreover, the small dimensions make all operations inside stables and barns simple.

Strong and simple construction ensures a long lifespan.

Model		Widt	h			Tee	th ler	ngth			٧	Veigh	t		Code	
Bale Fork (2 Teeth)	85 c	:m (33	3.5 in)			2 x 80) cm (3	31.5 ir	1)		40 kg	g (88.2	2 lbs)	C	3904	00
Bale Fork (3 Teeth)	85 c	m (33	3.5 in)	2 x	110 cm	า (43.3	in) + 1	1 x 80	cm (31	.5 in)	45 kg	g (99.2	2 lbs)	C	3904	01
Compatibility	<i>\</i> ?	<u>ئ</u> .	k√2	<i>₹</i> 3.}	みがり	ρ,	√.ÿ	8,4	80, Ki	ďp	107	6.351	13.KS)	d is so	√2,tx*	€J.
Model																
Bale Fork (2 Teeth)																
Bale Fork (3 Teeth)																
(*) C890025 adapter required							Von	, compat	blo		Compo	atible		Mot	compatib	0

() C890025 adapter required Very compatible Compatible Not compatible

SQUARE BALE CLAMP



FEATURES & BENEFITS

- Suitable for bales from 75 cm (2.5 ft) to 230 cm (7.6 ft)
- 2 cylinders
- Transport wrapped square bales without damaging the plastic

This clamp was designed to transport and stack round and square bales without damaging the plastic wrapping or net. Made from heavy duty steel, this clamp quickly and easily handles all types of bales, including silage, hay, and straw. The large clamp arms makes pick-up and storage of all bales sizes quick and easy. MultiOne machines with their telescopic boom can stack bales even at high heights.

Model		ax bale /eight*		_	1in bal length	_		Max b leng	_		W	eight		C	ode	
Square Bale Clamp	1000 k	g (2204	lbs)	75 c	m (29.	5 in)	230	cm (9	0.5 in)	270 kg	(595 l	bs)	C89	0415	5
(*) verify the lifting capacity of the	machine															
													`			



HORSE ARENA HARROW



FEATURES & BENEFITS

- · Multi-function surface processing
- A professional harrow that makes it easy to keep the horse arena in top condition
- Can be adjusted for several kinds of riding surfaces
- Once the adjustments have been done the harrow is very easy to use
- Support wheels: the harrow can be lifted off the ground and towed to desired place

The horse arena harrow is designed to smooth and

level sandy or mixed media horse riding surfaces. The harrow features multiple processes, beginning with the three sets of spring tines to break up the surface, a leveler to smooth and level the surface, and the compacting and spreader auger roller assembly that finishes the surface. The harrow also has side wheels that enable working along walls with no damage. Easily made adjustments enable weight and balance adjustments between the spring tines and roller/spreader assembly. Height adjustments to enhance processing difficult soils are made quickly and easily.

Note: the loader must be equipped with the trailer coupling.

Model		٧	Vidth			Wor	king [epth			Weig	ht			Code	
160		160	cm (63	in)		0 - 9 c	:m (0 -	3.5 ir	1)	218	3 kg (4	80 lbs	5)	C8	912	31
Compatibility	1, 3, My 2		ر _گ رۍ دې	لى. ئى	1,5	8,4	8.4.) dp	10,00	6.350	13,150	a tiggli	√1,*	€		
(*) C890025 adapter required							Very	compati	ible		Compatible			Not	compatib	ile

HORSE STABLE PACKER



FEATURES & BENEFITS

- Adjustable working width
- Offset left and right

The Horse Stable Packer is a large set of grip tongs for mucking out stalls quickly in a single operation. The adjustable width of the clamp and the wide side shift allow to operate in tight spaces. It is equipped with plastic edges that once worn out can be reversed or replaced.









Model	Working Width	Max Load*	Offset (right / left)	Weight	Code
Horse stable packer	290 - 300 cm (114 - 118 in)	500 kg (1100 lbs)	100 cm (39 in)	236 kg (520 lbs)	C890359

(*) verify the lifting capacity of the machine

Compatibility	\?\ \?\	J.,	⋈ 3	⟨5 ² ,	^{ري} رن	δ.	くぶ	8,4	90'is	dp	201	6.350	1390	dish	√5/ _¥	<₽
(*) C890025 adapter required							Vers	, compat	hle		Compa	atible		Not	compatible	ام

FEED DISPENSER



FEATURES & BENEFITS

- Easy distribution of flour, crushed grain etc.
- Self-loading: loading from ground level like with a normal bucket

MultiOne's animal feed dispensers bucket makes feeding the animals quick and easy. The front edge of the feed dispenser bucket can be used to easily fill up the bucket feeder. Feed is dispensed from the right side discharge chute, using the hydraulically powered auger located at the bottom of the feeder. The feed dispenser is designed to handle any sized grain and mix, making animal feeding a quick and simple process.

Model	Capacity*	Width	Discharge Side	Weight	Code
350	350 l (12.4 ft ³)	130 cm (51.2 in)	Right	140 kg (309 lbs)	C890420
520	520 l (18.4 ft ³)	180 cm (70.9 in)	Right	210 kg (463 lbs)	C890421

^(*) verify the lifting capacity of the machine

Compatibility	\ ?	<u>ئ</u> .	NJ.	<i>₽</i> ,	みがか	من.	√,5	8'y	80.00	ďp	107	6.351	1399	distri	√5' _¥	€1
Model																
350																
520																

SCREW FEED PUSHER



FEATURES & BENEFITS

- · Fast and easy way of moving feed to the animals
- Discharge in the right side
- High efficiency, also on larger farms
- Rear rubber scraper blade

Efficient way of moving uneaten feed back in front of the cattle. When moving, the screw mixes the feed and the fresh feed remains on top.

With the screw feed pusher drive speed can be higher. The rubber scraper blade at the rear of the attachment cleans the floor very efficiently. Once worn out, the rubber blade can be disassembled and reassembled backwards or replaced.

Model	1	Worki	ng Wi	dth			Heig	nt			We	eight			Cod	е
Screw Feed Pusher	•	130 cn	า (51.2	2 in)		44	cm (17	7.3 in)		1	15 kg	(254 l	bs)	_ C	8902	250
Compatibility	~	کئ	₩ŷ.	43.7	ęλ _γ γ	6,3	√,	8/4	00 di	dp	27	6.351	~ 3. KJ	diggl	√2, [*]	€l
(*) C890025 adapter required	V V W 13						Ver	compati	ble		Compa	atible		Not	compatib	le.

RUBBER SCRAPER



FEATURES & BENEFITS

- Heavy duty rubber blade
- Simple and efficient
- Each ends of the scraper blade can be adjusted forwards

The MultiOne rubber scraper is ideal for cleaning smooth surfaces in farm buildings and yards, improving hygiene and footing. It is also a easy and economical way to push uneaten silage back to the cattle on the feeding table.

The side ends can be tilted 30° forward to facilitate the movement of the material. Once worn out, the rubber blade can be disassembled and reassembled backwards or replaced.

Model			Wid	th		Ru	bber	Heigh	nt		Wei	ght			Code	
150		15	0 cm	(59 in)		35	5 cm (1	13.8 in	1)	73	kg (1	61 lbs	5)	C8	3903	51
200		200) cm (78.7 ir	1)	35	5 cm (1	13.8 in	1)	86	kg (1	90 lbs	;)	C8	3903	58
Compatibility	\?	<u>ئ</u>	NJ.	⇔ ,	ر کې کې	ري. ري	ر _ي ک	8,4	8,40	dp	2/2	6.351	13/30	9/350	√2, <u>*</u>	₹1
Model																
150																
200																
(*) C890025 adapter required			0 cm (78.7 in)				Ver	, compat	ihle		Compa	atible		Not	comnatih	ما

PUSH BROOM



FEATURES & BENEFITS

- Simple design creates minimal dust
- Few moving parts means low maintenance
- · Works perfectly for horse stables, farms, other brushing applications

The Push broom from MultiOne provides an economical solution to clear dirt on stables and farms, but it can be used to remove fallen leaves and other outdoor materials over a smaller area, like sidewalks or parking. This push broom uses a simple design that creates minimal dust while preventing flying stones or other debris. The brush is constructed from heavy-gauge polypropylene, providing long-lasting performance. There are two adjustable wheels that keep the height of the brush constant from the ground. The push broom is equipped with supports which can be extended when the broom is not in use, so that the push broom rests on the supports and the brush doesn't get damaged during storage. There are two slits where insert the pallet forks.

Note: suggested floating boom valve on machine.

Model	Max	Width	1	Brush	Widt	h	Lei	ngth		Brush	Height	t	We	ight		Cod	le
Push Broom	184 cm	(72.5	in)	160 cn	n (63 i	n) i	72 cm	(28.3 i	n)	25 cm	(9.8 in)) 20)5 kg	(452 ll	os) (C890	255
Compatibility				% 7	⟨ ₂).	₹,	المن الم	رن.	8,4	80,00	ďρ	107	6.351)	13.Kg	diszl	15.X	€J.
(*) C890025 adapter req	uired							Very	compa	itible		Compa	atible		Not	compatib	le

HIVE HANDLER



FEATURES & BENEFITS

- Fast and easy way to load and transport beehive boxes but also cardboard boxes and similar objects
- Hydraulic load lock
- · Foldable forks with adjustable width

Multione hive handler is intended basically for loading and transporting of beehive boxes, but it can handle other objects like cardboard boxes as well. The mover can carry many beehives at a time. It consists of a frame, a pallet fork that is mounted on the lower end of the frame, and a hydraulic grapple at the upper end of the frame which presses the boxes against the pallet fork. The beehive mover can be mounted on MultiOne loaders, and if the beehives need to be transported longer distances by truck it is easy to take the MultiOne on the truck as well and unload and move the beehives at the destination.

Thanks to the compact dimensions and the maneuverability of the MultiOne machines, it will be possible to move the hives even in the most inaccessible and steep places where other machines could not reach. It will also be possible to pass along the narrow rows of orchards to collect fruit crates.

Two models of two different sizes are available, on both the lower forks are adjustable in width and liftable to facilitate transport.

Model	Forks Length	Height	Max load capacity*	Forks Width	Weight	Code
160	105 cm (41.3 in)	90/160 cm (35.4/63 in)	1000 kg (2204 lbs)	46/71 cm (18/28 in)	184 kg (405 lbs)	C890690
240	105 cm (41.3 in)	135/240 cm (53.1/94.5 in)	1000 kg (2204 lbs)	46/71 cm (18/28 in)	225 kg (496 lbs)	C890691

(*) verify the lifting capacity of the machine

				ربي س		_	_	9K		10	ري	, 39gg	ري.	<u>*</u>	
√.`	Ĵ.,	NJ	₹,	3/1	6,3	۷,5	8,4	di	dp	\ <u>'</u>	6.5	1.8 KZ.	0/22	15.	♦
	\?\	√, √ ₂ ,	\\frac{1}{2} \text{\text{\$\gamma_2\$}}	7. 7.3 KJ 4.3.	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	7 2 1 1 5x1 2 2 X	\ \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	\ \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\					

DOZER BLADE



FEATURES & BENEFITS

- Rugged design delivers maximum uptime
- · Dozer blade can be angled 30 degrees left and right

The MultiOne dozer blade can be angled from the driver's seat, either on the right or on the left, thanks to a sturdy hydraulic cylinder. It is equipped with two adjustable back shoes to set the working depth. It can be used for a wide variety of jobs, from scraping hard soils, to grading and stacking loose soils, quick and easy. An ideal tool for projects from rough construction through fine landscaping Thanks to the excellent traction and the high pushing force of the MultiOne machines, it can also be used for heavyduty earthmoving jobs.

It must not be used for snow removal along roads and parking lots (in this cases must be used the snow plow or snow blade).

Model	Wic	dth		Sle	wing a	angle		H	leight			We	eight			Code	
140	140 cm	(55.1 i	n)		±30°)		53 cr	n (20.	8 in)	9	90 kg	(198 ll	os)	C	3904	70
180	180 cm	(71 in	1)		±30°			53 cr	n (20.	8 in)	1	05 kg	(232 l	bs)	C	3904	77
Compatib	ompatibility 💉			% 3	43.3	ريخ ا	رى رى	رئ	8 ^{,A}	80.00	dp	107	6.351	13/3	dish	√2,*	₹1
Model																	
140																	
180																	
(*) C890025 adapt	er required	×d						Very	compati	ble		Compa	atible		Not	compatib	le

TRENCHER



FEATURES & BENEFITS

- · Minimal damage to the ground on trenching area
- Digs from 14 to 20 cm (5.5 to 7.9 in) wide trench and moves all ground to the right side of the trench

Very fast and clean way to dig trenches for cables, drains, piping etc.

With MultiOne and trencher you can easily dig narrow trenches without damaging the ground on the digging area. The trencher does a clean trench which can easily be filled with a bucket or a dozer blade. Planetary drive with hydraulic motor guarantee powerful and trouble free operation. Max digging depths are 60, 90 and 120 cm (23.6, 35.4 and 47.2 in) respectively, depending on model. Digging width is either 14, 16, 18 or 20 cm (5.5, 6.3, 7.1 or 7.9 in), every chain tools kit can be set for different widths. Hard ground version chains have tungsten reinforcements to ensure long lasting performance in hard and rocky soil, otherwise the standard version is the best choice for vegetative ground.

- Trencher is ideal for smaller cable or pipe laying.
- Digging speed with a trencher is 2-3 times quicker compared to a backhoe.
- Combination of an articulated MultiOne and trencher leaves almost no marks of digging operations after the work is done. This makes it a perfect solution for gardens and other lawn areas.

It features an adjustable depth control foot which ensures the operator digs at a set depth at all times and efficient spoil removal for effective compaction back into the trench.

Model	Max Digging Depth		Max Digging Width	\	Weight	Code
Trencher 60 w/o chain tools ¹	60 cm (23.6 in)	14 to	20 cm (5.5 to 7.9 in)	205,5	kg (453 lbs)	C890206
Trencher 90 w/o chain tools ¹	90 cm (35.4 in)	14 to	20 cm (5.5 to 7.9 in)	235 I	kg (518 lbs)	C890207
Trencher 120 w/o chain tools ¹	120 cm (47.2 in)	14 to	20 cm (5.5 to 7.9 in)	248 l	kg (547 lbs)	C890208
Tools	Trencher 60		Trencher 90		Trenc	her 120
Tools kit for soft ground ²	C891002		C891003		C89	21004
Tools kit for hard ground ²	C891005		C891006		C89	71007

(1) Tools kit required. (2) Trencher required.

Compatibility	\?	گ _ن .	ΝŽ	₹ ⁵ .}	⁶	6,3	√,5	8,4	80.12 82.12	ďρ	10,1	6.351	13/19	di थे	√5' _¥	€Ì
Model																
60 - soft groud																
90 - soft groud																
120 - soft groud																
60 - hard groud																
90 - hard groud																
120 - hard groud																
(*) COOOOE adapter required															•	


MINI DIGGER




FEATURES & BENEFITS

- Efficient and economical solution for smaller digging jobs
- 90° rotation model available
- Very fast to mount on Multione
- Simple and light to transport from job site to another
- High unloading height
- Material can easily be transported further away

MultiOne mini digger is an efficient solution for small digging operations where maximum digging depth of 1200 mm or 1500 mm is enough and digging is not an everyday work. It mounts directly on the quick attach plate of the loader and is operated with the auxiliary hydraulics control lever, or with the buttons of the joystick.



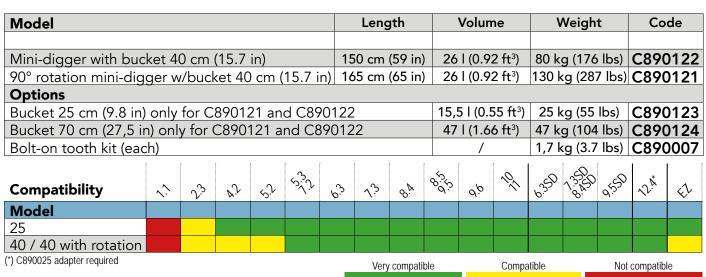

BACKHOE



FEATURES & BENEFITS

- Powerful backhoe, with 180° rotation
- · Excellent visibility of the digging area
- Easy to connect and disconnect to Multione
- · Smooth movements, easy to operate
- · Powerful and professional backhoe with good outreach

The MultiOne backhoe is a compact yet powerful excavator. It's ideal for landscaping and nursery projects, sewage system and septic tank excavating, water and power line trenching, and many other excavating projects. Using MultiOne's quick mount system, this backhoe is quick and easy to attach. The independent operator's seat and hydraulic controls comes as standard. Thanks to the traction and the maneuverability of the MultiOne machines, it will be possible to reach the most inaccessible job sites. Three models of buckets are available and digging teeth can be installed for the hardest terrains. 2 teeth for Bucket 25 cm, 3 teeth for Bucket 40 cm and 5 teeth for Bucket 70 cm.

Model		Dig	ging l	Depth		Wic	dth		Vol	ume		W	eight		Co	de
Backhoe 215 w/buck	et 40	215	cm (8	4.6 in)		/	'		26 I (0	.92 ft ³)	į	530 kg	(1168	lbs)	C890	117
Backhoe 260 w/buck	et 40	260	cm (10	02.4 in)	/	'		26 I (0	.92 ft ³)	(600 kg	(1322	lbs)	C890	120
Options																
Bucket 25 cm (9.8 in)	Bucket 25 cm (9.8 in) /					5 cm ((9.8 in))	15,5 l (0.55 ft ³)	25 kg	(55 lb	os)	C890	123
Bucket 70 cm (27,5 ir	ucket 70 cm (27,5 in) /) cm (2	27.5 in	1)	47 l (1	.66 ft ³)		47 kg	(104 l	bs)	C890	124
Bolt-on tooth kit (eac	olt-on tooth kit (each)					/	'			/		1,7 kg	(3.7 l	bs)	C890	007
									80,0		10,		.350	S	*	
Compatibility					οχ'J	6.3	√ي.	8,	di	dp	11	632	1.3/12,	diss	√5' _¥	₹
Model																
215																
260																
(*) C890025 adapter required							Very	compa	atible		Com	patible		Not	compatib	le

RADIO CONTROLLED BACKHOE



FEATURES & BENEFITS

Full Visibility

(*) C890025 adapter required

- Proportional controls
- Fast and easy to use

The MultiOne Backhoe it's a best seller attachment: sturdy, reliable with a huge pushing force and almost 180° rotation. MultiOne believes in the continuous improvement: from now on it's available the radio controlled version of MultiOne Backhoe! The proportional controls assure smooth and accurate movements. Thanks to the radio control the operator's seat and hydraulic control are no longer necessary: you can control the backhoe directly from the machine seat or occupy the best position to see the digging area.

It's the best choice to operate on tight spaces and wherever the digging precision it's required. Three models of buckets are available and digging teeth can be installed: 2 teeth for Bucket 25 cm, 3 teeth for Bucket 40 cm and 5 teeth for Bucket

F	A B C
	H

70 cm.													Ļ	à ·			
Mod.	Α	В		С		D		Е		F			G	F	ł	I	
215	270 cm (106.4 in)	177 cm (69.5 in)		271 cr 106.6 i		73 cn (28.7 i		175 c (68.8		221 d (87 i		1	72°	85	5°	27 (10.	cm 5 in)
260	314 cm (123.6 in)	222 cm (87.4 in)		320 cr (126 ir		93 cn (36.6 i		198 c (78.1		267 d (105		1	72°	85	5°	27 (10.	cm 5 in)
Model			Dig	ging	Dept	h	Wic	dth		Vol	ume		W	eight'		Cod	de
Backho	oe 215 w/bu	ıcket 40	215	cm (8	34.6 ir	ո)	/	'		26 l (0	.92 ft	³)	510 kg	(1124	lbs)	C890	125
Backho	oe 260 w/bu	ıcket 40	02.4 i	n)	/	'		26 (0	.92 ft	³)	580 kg	(1278	lbs)	C890	126		
Option	าร																
Bucket	25 cm (9.8	in)		/		2	5 cm	(9.8 in) '	15,5 l (0.55 1	t ³)	25 kg	g (55 lk	os)	C890	123
Bucket	70 cm (27,	5 in)		/		70) cm (27.5 ir	1)	47 l (1	.66 ft	³)	47 kg	(104 l	bs)	C890	124
Bolt-or	n tooth kit (e	each)		/			/	'			/		1,7 kg	g (3.7 l	bs)	C890	007
Compa	atibility					かりず	گن	رن س	8.	80,0	ďρ	105	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	13,50	9,550	12.X	
Model			•														
215																	
260																	

Very compatible

Compatible

Not compatible

AUGER



FEATURES & BENEFITS

- Wide range of auger drive units with different torques enables efficient use of 10 cm (4 in) to 100 cm (40 in) augers
- · Augers with tungsten teeth available

The powerful hydraulic auger drive unit, combined with various auger diameters, provide excellent flexibility in all soil types.

The auger is the ideal accessory to perform holes for fences, poles for vineyards, for trees planting, for the installation of pillars or streetlights in all types of terrain. The auger drive is available in three versions:

• T1 for normal soil conditions

T2 T3

- T2 for hard, rocky ground, used with augers up to 50 cm (20 in)
- T3 for hard, rocky ground, used with augers up to 100 cm (40 in)

A large variety of augers are also available with replaceable tungsten teeth for the most difficult terrains, and it is also possible to install extensions, each 1 m long, to reach greater digging depths. The augers are equipped with a special joint that allows to make a perfectly vertical hole no matter how the machine is positioned. The auger combined with the high hydraulic flow of MultiOne machines allows you to drill holes quickly in any terrain.

Model			То	rque			D	rills				Weig	ht		Coc	le
T1 – standard drive u	ınit		100) kgm		10 -	50 cn	า (4 - 1	19.7 in	1)	90	kg (19	98 lbs)		C890	830
T2 – heavy duty drive						10 -	50 cn	า (4 - 1	19.7 in	1)	110	kg (24	42 lbs)	C890	831
T3 – heavy duty drive	72 – heavy duty drive unit 73 – heavy duty drive unit					30 - 10	00 cm	(11.8	- 39.4	in)	150	kg (3	31 lbs)	C890	832
Compatibility	\?·	√3.	N .2	⁶ 6.	ر _ک ی ری	633	√3.	8,4	80. iv	ďρ	2/2	6.351	1390	4550	12.x	€1
Model																
T1																

OPTIONS FOR AUGER

Heavy Duty Auger Drill	Diameter	Length	Code
10	10 cm (4 in)	100 cm (39.4 in)	C890840
15	15 cm (6 in)	100 cm (39.4 in)	C890841
20	20 cm (7.9 in)	100 cm (39.4 in)	C890842
25	25 cm (9.8 in)	100 cm (39.4 in)	C890843
30	30 cm (11.8 in)	100 cm (39.4 in)	C890844
35	35 cm (13.8 in)	100 cm (39.4 in)	C890845
40	40 cm (15.7 in)	100 cm (39.4 in)	C890846
50	50 cm (19.7 in)	100 cm (39.4 in)	C890847
60 - T3 auger only	60 cm (23.6 in)	100 cm (39.4 in)	C890849
70 - T3 auger only	70 cm (27.6 in)	100 cm (39.4 in)	C890851
80 - T3 auger only	80 cm (31.5 in)	100 cm (39.4 in)	C890853
90 - T3 auger only	90 cm (35.4 in)	100 cm (39.4 in)	C890855
100 - T3 auger only	100 cm (39.4 in)	100 cm (39.4 in)	C890857
Auger Drill w/tugsten teeth Rock Drill	Diameter	Length	Code
15	15 cm (6 in)	100 cm (39.4 in)	C890880
20	20 cm (7.9 in)	100 cm (39.4 in)	C890881
25	25 cm (9.8 in)	100 cm (39.4 in)	C890882
30	30 cm (11.8 in)	100 cm (39.4 in)	C890883
35	35 cm (13.8 in)	100 cm (39.4 in)	C890884
40	40 cm (15.7 in)	100 cm (39.4 in)	C890885
50	50 cm (19.7 in)	100 cm (39.4 in)	C890886
60 - T3 auger only	60 cm (23.6 in)	100 cm (39.4 in)	C890888
70 - T3 auger only	70 cm (27.6 in)	100 cm (39.4 in)	C890890
80 - T3 auger only	80 cm (31.5 in)	100 cm (39.4 in)	C890892
90 - T3 auger only	90 cm (35.4 in)	100 cm (39.4 in)	C890894
100 - T3 auger only	100 cm (39.4 in)	100 cm (39.4 in)	C890896
Auger Drill Extension	Diameter	Length	Code
10	10 cm (4 in)	100 cm (39.4 in)	C890860
15	15 cm (6 in)	100 cm (39.4 in)	C890861
20	20 cm (7.9 in)	100 cm (39.4 in)	C890862
25	25 cm (9.8 in)	100 cm (39.4 in)	C890863
30	30 cm (11.8 in)	100 cm (39.4 in)	C890864
35	35 cm (13.8 in)	100 cm (39.4 in)	C890865
40	40 cm (15.7 in)	100 cm (39.4 in)	C890866
50	50 cm (19.7 in)	100 cm (39.4 in)	C890867
60 - T3 auger only	60 cm (23.6 in)	100 cm (39.4 in)	C890869
70 - T3 auger only	70 cm (27.6 in)	100 cm (39.4 in)	C890871
80 - T3 auger only	80 cm (31.5 in)	100 cm (39.4 in)	C890873
90 - T3 auger only	90 cm (35.4 in)	100 cm (39.4 in)	C890875
100 - T3 auger only	100 cm (39.4 in)	100 cm (39.4 in)	C890877


GRADER



FEATURES & BENEFITS

Optional laser control package for precise grade control

The grader attachment converts the MultiOne into a high performance grading system, well suited for confined areas not accessible to larger machines. It is possible to level roads, squares, playgrounds and carefully lay gravel and sand. The hydraulically controlled moldboard is controlled using the cab mounted auxiliary controls. To increase the grader efficiency and precision, the MultiOne's grader can be equipped with an optional laser control system. The grader is equipped with two front wheels mounted on a floating frame that assures the stability even on uneven ground.

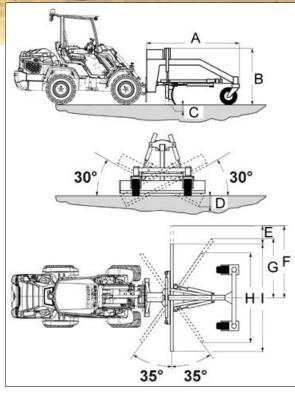

	Α	В	С	D	E	F	G	Н	ı
cm	222	132	16,5	35,5	40	147	109	174	213
in	87.4	51.9	6.5	14	15.7	57.7	42.9	68.3	83.8

Model					В	lade v	vidth			٧	Veigh	t			Code	
Grader with hydraulic	c conf	trols			210) cm (8	32.7 in)		550 k	g (121	2 lbs)		C8	9010	25
Laser (receiver only) t	ser (receiver only) twin angle										/			C8	9010	06
											_	١ .	0		I	1
Compatibility	√,`	Ŷ.,	N.	6 ²).	(2)/J	6,3	√,5	8,4	80,0	ďρ	107	6.350	13/19	9/20	12.X	€1
(*) C890025 adapter required							Very	compatil	ole		Compa	ıtible		Not (compatib	le

CEMENT MIXER



FEATURES & BENEFITS

- Faster than a stand alone mixer
- Designed to work in hard-to-reach areas
- Easy way to make concrete in places where electricity is not available
- Bidirectional rotation

The hydraulically powered cement mixer is an inexpensive attachment that lets you mix, transport, and pours concrete faster than a stand-alone mixer. This unit's compact size makes it the ideal tool when working on sidewalks, driveways, footings, small building floors, and other hard-to-reach or limited access areas where electricity is not available.

The concrete can be mixed in the deposit material area and then quickly transported to the working area. Thanks to the lifting boom of MultiOne machines, even the concrete pouring is much easier. The solid structure and direct drive transmission ensure long life and low maintenance.

Model								Vol	ume*		W	eight			Code	
Cement Mixer								350 I (12.4 f	t ³)	95 kg	(210	lbs)	C8	9013	31
(*) verify the lifting capacity of the r	nachine															
					0-				90. 60.			_	ري			I
Compatibility	Compatibility									dp	10/1	6.350	13/2	4221	15 X	€1
(*) C890025 adapter required							Ver	y compati	ble		Compa	atible		Not	compatib	le

CONCRETE MIXING BUCKET



FEATURES & BENEFITS

- Hydraulically powered mixing and unloading system
- · Easy and efficient way to make concrete in places where electricity is not available
- Self loading, sand can be taken to the bucket directly from the pile
- Concrete can be poured to over 2 m height
- · Removable safety grill promotes easy cleaning and maintenance

The concrete mixing bucket allows the operator to load, mix, transport, and discharge concrete much faster than the traditional stand-along mixer and wheel barrow. This unit's compact size, when combined with the MultiOne, makes it ideal for pouring sidewalks, driveways, footings, small buildings floors, and many other limited access locations. The

bucket is emptied from the bottom hatch. Hatch opening is powered by a hydraulic cylinder controlled from driver's seat. The bucket is also equipped with a flexible emptying tube which mounts on the bottom hatch. This enables pouring of the concrete further away from the bucket. Designed for high volume production, this unit minimizes downtime.

Combined with the MultiOne, it becomes an efficient, reliable, and cost efficient system.

Model	Volume*	Outlet Ø	Hose Length	Weight	Code
200	200 l (7 ft ³)	13,5 cm (5.3 in)	160 cm (63 in)	220 kg (485 lbs)	C890140
250	250 l (8.8 ft ³)	18 cm (7.1 in)	150 cm (59 in)	320 kg (706 lbs)	C890141

(*) verify the lifting capacity of the machine

					/ ³ -		F		~~.		~	-0	5	-0	*	
Compatibility	1.	J.3	N.Z	45.7	5,75	6,3	√ې	8,4	P.10	ďρ	1/1	6.351	13/2	طنجي	15 V	€1
Model																
200																
250																
(*) C890025 adapter required							Verv	compati	ble		Compa	ntible		Not	compatib	le

COLD PLANER



FEATURES & BENEFITS

- Great cold planing ability
- Planer drum improves planer efficiency
- Available with drum or cutting disc
- Side shift as standard

Ideal design for milling damaged asphalt and concrete surfaces in preparation for resurfacing.

The cold planer can be converted from surface planing to slot cutting. Use a cutting disk for cutting expansion crack slots, or slots for embedding wires or tubing.

The standard planer drum, equipped with carbide cutting teeth and the self leveling suspension, efficiently planes the pavement surface.

The small size combined with the great efficiency make it ideal for working in confined spaces hard-to-reach. The drum is equipped with replaceable teeth when worn out.

Model	Digg	ing d	epth	Max	c plan	ing w	idth	Max	side	shift		We	eight			Code	
Cold Planer	11	cm (4	in)	3	5 cm (13.8 iı	n)	65 c	m (25	.6 in)	62	20 kg ((1367	lbs)	C8	901	50
Cutting disc	Cutting disc 15 cm (6 in)				7,5 cm	n (3 in))	65 c	m (25	.6 in)			/		C8	901	52
			ر. رئ	N.J.	<i>⇔</i> .}	ري ري ي	<i>\range</i>	√ ₀ ,5	8/7	80.0	dp	27	6351	13.KS	420	15. X	♦
*) C890025 adapter required								Very	compati	ble		Compa	atible		Not	compatib	le

HYDRAULIC BREAKER



FEATURES & BENEFITS

- Top quality sound isolated MultiOne breakers are quiet and powerful
- · High power-to-weight ratio
- Compact dimensions

The narrow breaker profile enables the breaker to reach into places that other breakers can't.

With a minimum of seals and moving parts, the MultiOne hydraulic breaker provides unsurpassed durability and simplified maintenance. It is equipped with a vibration damping system that also attenuates noise emission. MultiOne loader with breaker is a very efficient tool in demolition and refurbishing operations: do the demolition with Multione and breaker, take the debris away with Multione and bucket – very fast and effective.

Another benefit of this combination is its compact dimensions: you can go almost anywhere with this unit.



MOIL CHISEL
STANDARD



Model	Impact energy	Impact rate	Ø Tool	Weight	Code
DMS 50	120 J	1200 bpm	38 mm (1,3 in)	60 kg (132 lbs)	C890163
DMS 95/2	240 J	1200 bpm	45 mm (1,8 in)	95 kg (210 lbs)	C890164
DMS 165	330 J	1200 bpm	45 mm (1,8 in)	165 kg (365 lbs)	C890165

				, ⁰ 3				<u>-</u> ا		20		3		.*	
^ `	J.,5	NJ.	₹.j.	D, J	6,5	√,5	8/7	Politi	ďρ	17	6350	13/2	0/22	15 V	₹I
l l															
_	\\ \tag{\chi}	,		, J ₃ K ₃ A ₃	/, \(\frac{1}{3}\) \(\begin{array}{cccccccccccccccccccccccccccccccccccc	1, 53 KJ PJ PJ J	7, \(\frac{1}{3}\) \(\frac{1}\) \(\frac{1}{3}\) \(\frac{1}\) \(\frac{1}\) \(\frac{1}\) \(\frac{1}\) \(\frac{1}	1, ¹ 3 ¹ 3 ¹ 3 ¹ 3 ¹ 3 ⁰ y	1, 5, ky ey, ey, e, d, e, e, e, e,	1, J3 KJ PJ PJ P3 J3 BW BOJY OP	1, 53 KJ PJ PJ PJ JJ PS J3 PW POLY OF JA	1, 53 KJ PJ PJ JJ P3 13 PV PJ PP PJ PS	1, 53 KJ PJ PJ PJ P3 13 PV PZ PV PZ PV PZ	1, \(\frac{1}{2} \) \(1, 53 KJ PJ PJ P3 13 PV PJ P4 P5 PV P3 PV P3 PV P3 PV P3 PV P3 PV PV P3 PV P3 PV

SCREENING BUCKET



FEATURES & BENEFITS

- Heavy duty construction
- · Easy and fast processing
- Separates stone/soil/vegetation
- · Screens without crushing or shredding
- Suitable for different types of soil
- Separate project materials on-site, saving time and money

The MultiOne screening bucket separates different sized materials thanks to its unique construction. The purpose of the screening bucket is to separate larger and smaller particles from the soil and not crush the larger material into smaller particles.

The bucket design allows to load and unload the material quickly and easily.

Topsoil making for landscaping, nurseries and wholesale is the principal use while some construction contractors utilise the bucket for screening.

Model	Max Load*	Volume	Width (A)	Screened materials (LxHxW)	Weight	Code
Screening bucket	280 kg (617 lbs)	250 I (8.8 ft ³)	120 cm (47.2 in)	20 - 20 - 35 mm (0.8 - 0.8 - 1.4 in)	320 kg (705 lbs)	C890030

(*) verify the lifting capacity of the machine



SWEEPER WITH COLLECTOR BOX



FEATURES & BENEFITS

- · Powerful sweeper for large areas
- Side brush available
- Humidification kit available

Whether traveling forward or backwards, this attachment quickly and quietly sweeps and collects dirt and debris, and easily dumps out the refuse. Perfect system for cleaning parking lots, sidewalks, loading docks, warehouses, and more. The MultiOne sweeper is equipped with a floating attachment bracket and 4 support wheels that guarantee smooth and easy sweeping operations. The sweeping angle is manually adjusted (30° to the left and + 30° to the right). Optional: 1) Collector box with manual opening lever (C895001) or electric opening (C890266 and C890268). 2) Dust reduction water spray system is made up of a 12V electric pump, 4 spray nozzles, and one or two water tanks (70 l each). 3) A single 500 mm (20 in) hydraulically driven side brush can be mounted on the right side of the collector box. Note: suggested floating boom valve on machine.

Model	Width	Diameter	Volume	Weight	Code
Sweeper 100	100 cm (39.4 in)	35 cm (13.8 in)	/	130 kg (287 lbs)	C890229
Sweeper 120	120 cm (47.2 in)	48 cm (18.9 in)	/	153 kg (337 lbs)	C890265
Sweeper 150	150 cm (59 in)	48 cm (18.9 in)	/	173 kg (381 lbs)	C890267
Waste box for Sweeper 100	100 cm (39.4 in)	/	70 I (2,5 ft ³)	40 kg (88.2 lbs)	C895001
Waste box for Sweeper 120	120 cm (47.2 in)	/	90 l (3,2 ft ³)	50 kg (110 lbs)	C890266
Waste box for Sweeper 150	150 cm (59 in)	/	115 l (4 ft ³)	57 kg (125.6 lbs)	C890268
Humidification kit for Sweeper 120	/	/	70 l (18,5 gal)	20 kg (44 lbs)	C890222
Humidification kit for Sweeper 150	/	/	140 l (37 gal)	40 kg (88 lbs)	C890225
Side brush for Sweeper 120 and 15	50	48 cm (18.9 in)	/	23 kg (51 lbs)	C890226
	1 1	1 1 1	1 1		1 1

Compatibility	\ ?	<u>ئ</u> .	N.J.	<i>₹</i>).	^{ري} رن ري	کی	√ي ب	8,4	80.K	ďρ	107	6.351	13/19	distri	√5' _¥	€1
Model																
100																
120																
150																

LEAF VACUUM



FEATURES & BENEFITS

- Powerful vacuum
- Rotary side brush
- 5 m (16 ft) hand hose available
- Easy emptying thanks to hydraulic door opening from driver seat

This attachment creates tremendous suction for collecting leaves, grass clippings, and other loose debris in parks, lawns, yards etc. The right rotary side brush extends the



cleaning area. The leaf vacuum is equipped with a floating system and four adjustable wheels that allow to work well on uneven surfaces also. The suction mouth is made of plastic material that can absorbs even small impacts.

The option hand held hose allows you to clean tight work areas, flower beds, along fences, and many other hard-to-reach locations.

The leaf vacuum is equipped with a hydraulically opening door on the box floor for easy disposal of the collected debris into a container, trailer, etc.. It requires low maintenance and cleaning is quick and easy.

Note: suggested floating boom valve on machine.

Model	Hose Ø	Hose Length	Width	Volume	Suction Capacity	Weight	Code					
Leaf vacuum	/	/	100 cm (39.4 in)	300 l (10.6 ft³)	50 m³/min (1800 ft³/min)	155 kg (342 lbs)	C890239					
Hose	18 cm (7 in)	5 m (16 ft)	/	/	/	/	C890245					
Right side brush 48 cm (18.9 in) nylon												

WEED BRUSH



FEATURES & BENEFITS

- Brush with steel bristles
- Powerful hydraulic motor
- Manual angle adjustment

A hydrostatic drive motor, adjustable tilt, and a specially designed brush are combined to create an effective system to remove weed and plant growth for pavement joints.

The brush angle adjustment allows easy cleaning along walkway edges or along and in wall areas.

The weed brush is an effective tool for cleaning walkways, bike paths, car parks, school yards, general sweeping and even frozen ice and snow, making this a very flexible addition to your maintenance fleet.

It is equipped with a safety guard to prevent the projection of objects. The brush sticks out of the right side of the machine.

Note: suggested floating boom valve on machine.

Model						Brush	diam	eter			We	ight			Code	е
Weed brush 45						45 cm	า (17.7	in)		7	5 kg (165 lb	s)	С	8902	271
Weed brush 75						75 cm	า (29.5	in)		8	4 kg (185 lb	s)	С	8902	270
Compatibility	bility \\ \tau \\ \gamma^3 \\ \lambda^2 \\ \sigma^3					ري. ري.	ر _ي	8,4	8,6	0 00 00 000 000 0000					√2, [*]	€1
Model																
Weed brush 45																
Weed brush 75																
(*) C890025 adapter required					Very compatible				ible		Compa	atible		Not	compatib	le

DEBRIS AND LEAF BLOWER



FEATURES & BENEFITS

- 360 degree 12V nozzle rotation from operators position
- Nozzle options for specific applications
- Heavy-duty frame construction

The debris and leaf blower provides great air volume flow and the capability to rotate the nozzle 360 degrees from the operator's seat.

This blower delivers superior productivity and greater efficiency in jobs ranging from cleaning sidewalks, streets, car parking and other maintained paved areas, to blowing grass clippings, leafs, snow, sand or other debris off fairways or greens. Short rectangular nozzle is standard and several nozzles are also available as option.

Model					Dime	nsions	with	Nozzle	e (LxWx	H)	١	Neigh	nt		Code	;
Debris and leaf blow	wer			1	63 x 1	17 x 8	32 cm	(64 x	46 x 3	2 in)		136 kg 300 lb	_	С	8920	00
Options																
1 90° polymer noz	zle										3 k	g (6.6	lbs)	С	8920	01
2 Long rectangular	1 7										3 k	g (6.6	lbs)	С	8920	02
Compatibility	1 1 1 2											6.551	13/50	aksil	√5, <u>¥</u>	€1
(*) C890025 adapter required					Very compatible							ntible		Not	compatibl	e

SOLAR PANEL WASHER



FEATURES & BENEFITS

- Large autonomy
- Non scratch bristles
- Tiltable


The MultiOne solar panel washer is designed to clean photovoltaic solar panels and to help maintain and optimize the performance.

By utilizing the solar panel washer and performing regular cleaning and maintenance are crucial to ensure your solar panels are not losing up to 17% -25% of power generation due to the accumulation of dirt, dust, and other foreign matter.

The big rotary broom with soft bristle let you clean about 4,3 meter quickly, effective and without damage the solar panels. The solar panel washer can clean from 0,7 MW/h to 2 MW/h depending on surface type.


The spray bar is equipped with 7 changeable nozzles. Large autonomy is assured by the big tank (500 l / 132 gal) and low water consumption bristles: 270 l/h, 400 I/h or 550 I/h based on the nozzles used between the 3 standard types. The rotary broom can be rotated to allow easy and quick cleaning of many rows of solar panel array. The machine must be equipped with the rear electric socket to feed the water tank pump.

Note: The use on solar panel washer of rear weights C883077 is suggested.

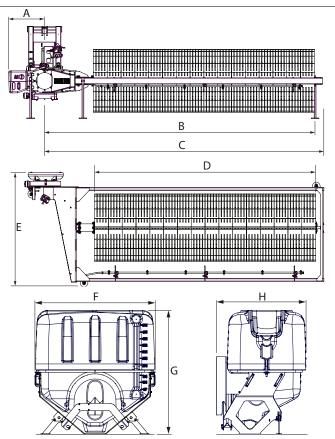


				Dime	nsion	S		
	Α	В	С	D	Е	F	G	Н
cm	57	510	522	430	170	116	120	86
in	23	201	206	170	67	46	48	34

Model	Brush Length	Tank capacity	Rotation angle	Weight	Code
Solar panel washer	430 cm (170 in)	/	360°	440 kg (970 lbs)	C891292
Tank	/	500 l (132 gal)	/	130 kg (287 lbs)	C891286
Rear weights	/	/	/	160 kg (353 lbs)	C883077



Very compatible Compatible Not compatible

ROTARY SWEEPER

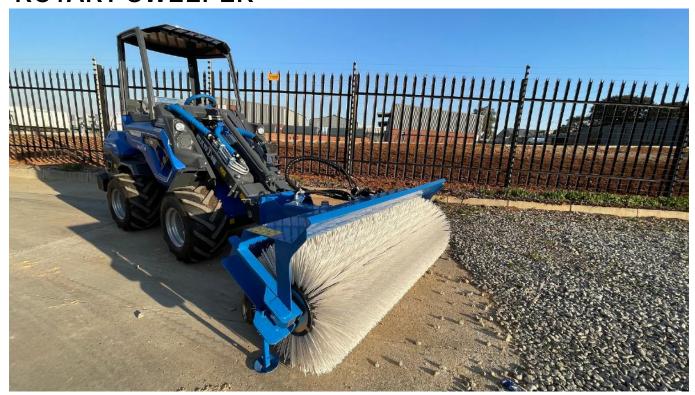

FEATURES & BENEFITS

- · Remotely controlled hydraulic angle adjustment
- · Long lasting bristle material
- Equipped with extendable supports for storage: nylon brush doesn't get damaged during storing
- · Direct drive transmission, low maintenance

Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farm yards or warehouses, you can rely on the rotary broom to get the job done right.

The brush can be hydraulically tilted 30° both on the right and on the left comfortably from the driver's seat. There are two adjustable wheels that keep the height of the brush constant from the ground and an elastic joint able to absorb small shocks avoiding possible

damage. The sweeper is equipped with supports which can be extended when the sweeper is not in use, so that the sweeper rests on the supports and the nylon brush doesn't get damaged during storage. Combined with a MultiOne machine with fully cab is the ideal attachment for the autumn and winter maintenance. **Note:** suggested floating boom valve on machine.

Model	Diameter			rush aterial		_	Brush Vidth			sh Wi Iax Ar		'	Weigh	nt		Code	•
130	60 cm (23.6	in)	n	ylon		130 cı	m (51.	2 in)	113 c	m (44	.5 in)	160	kg (35	3 lbs)	C	8902	41
160	60 60 cm (23.6 in)		n	ylon		160 d	cm (63	in)	139 c	m (54	.7 in)	190	kg (41	9 lbs)	C	8902	42
Compatibility		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	<i>√</i> ,3	NJ.	43.5	^{جي} ن ک	δ,	المن	8/	800 to	ďρ	107	6.351	13,50	d is li	√2, <u>*</u>	€1
Model																	
130																	
160	60																
(*) C890025 ad	C890025 adapter required						Ver	y compati	ble		Compa	atible		Not	compatib	le	

TRAILER



FEATURES & BENEFITS

- Robust and versatile dump trailers, ideal for earthmoving and other lighter duty jobs
- · Manual or hydraulic tipping
- Removable sides

MultiOne trailers are useful for transporting garden waste, top soil, mulch, etc. Equipped with pintle a style hitch and parking brake. Available with either manual or hydraulic dump system.

- 600 model: manual rear tipping, foldable rear side, parking brake, support leg for parking.
- 1200 and 1500 model: hydraulic rear tipping, foldable side and rear sides, road lights with seven-pin standard plug, parking brake, third wheel for parking, two manual winches.

Attention: the loader must be equipped with the rear hydraulics outlet to drive the hydraulic tipping and with the trailer coupling.

Model	Max Load	Lei	ngth	,	Width	1	Side Heig		Tip	ping	\	Vheel	s	Weig	ght	Со	de
600	450 kg (992 lbs)		0 cm 9 in)		115 cm 45.3 ir		35 c (13.8		ma	anual	10	5-6.50	-8	150 (331		C890	0770
1200	870 kg (1918 lbs)		0 cm .7 in)		140 cm 55.2 ir	-	35 c (13.8		hyc	lraulic	18	5/70 F	213	330 (728		C890	0775
1500	980 kg (2160 lbs)		0 cm .6 in)		150 cm (59 in)		35 c (13.8		hyc	lraulic	20	5/70 F	R15	520 (1146		C890	0776
Compat	tibility	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	ړ <u>.</u>	N 2	⟨5 ² .	^{مر} ري	, P.;	√3;	8,4	80,60	ďp	107	6350	13/3	9/350	√2, [*]	€J.
Model																	
600																	
1200																	
1500																	
(*) C890025 ac	*) C890025 adapter required							Ver	, compat	ible		Compa	atible		Not	compatib	le

HIGH PRESSURE WASHER



FEATURES & BENEFITS

- Efficient high pressure, self contained washer system
- Equipped with a hand held spray wand with a 10 m (33 ft) hose

High pressure washer is perfect for cleaning construction sites and general maintenance. The powerful 170 bar (2,465 psi) pressure jet cleans dirt, built up and dry mud, waxes, oils, grease, strips old paint, and more from any surface.

This pressure washer system, combined with the on-board 200 l (53 gal) water tank, makes cleaning buildings and graffiti removal an efficient process. It is possible to regulate the water pressure, the tank is equipped with an filter and a level indicator. The hand held spray has a adjustable nozzle to set the water jet width. Using the MultiOne's hydraulic power and portability, this self contained pressure washer system effectively works in remote locations where electricity or water are not available.

Model	Pressure	Volume*	Hydraulic power	Pipe length	Weight	Code
High pressure washer	170 bar	200 l (52.8 gal)	35 l/min (9.2 GPM)	/	75 kg (166 lbs)	C891200
Hand spray wand (incl	uded)	/	/	10 m (32.8 ft)	/	/

(*) verify the lifting capacity of the machine

Compatibility	\?·	<u>ئ</u> .	Ϋ́Σ	<i>⇔</i> .	ρ ^λ ý.γ	<i>6.</i> 5	رن	8,4	8,4,2	ďρ	107	6.351	13/19	d रेट्टी	√2, <u>*</u>	♦
(*) C890025 adapter required							Very	compati	ble		Compa	atible		Not	compatib	le


STAKE INSTALLER



FEATURES & BENEFITS

- Efficient and time saving
- Powerful attachment

The stake installer attachment lets you use your MultiOne mini loader to rapidly drive stakes into the ground with minimal ground preparation. The specially designed tool holds a fence stake while a hydraulically powered vibratory hammer pounds the stake into the ground. The MultiOne boom enables the efficient handling of long stakes.

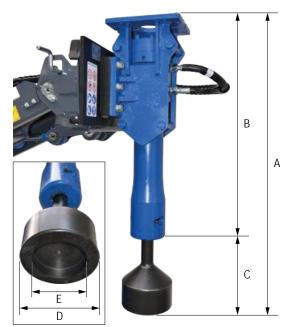

		D	imensio	ns	
	Α	В	С	D	Е
cm	98	74	24	18	12
in	38.6	29.1	9.5	7	4.7

Model	Impact	energ	Jy	lm	pact r	ate		Ø	Tool			Weig	ht		Cod	е
Stake installer	19	0 J		1000	/1300	bpm	4	15 mn	า (1,8 i	n)	120 kg (265 lbs)) (2890	780
Compatibility	^.	ک _. ن	ŇJ.	<i>⇔</i> .}	かジケ	<i>ڳ</i> ئ	رئ	8 ^{,A}	800 is	dp	2/2	6.551	13,150	97550	IJ _,	€1
(*) C890025 adapter required							Very	compati	ble		Compa	atible		Not	compatib	le

AERIAL WORK PLATFORM



FEATURES & BENEFITS

- Safe and legal way to do building repairs, painting, light bulb changes etc.
- MultiOne carries the platform anywhere
- Indipendent from external power source
- The maximum allowed load on the basket is 120 kg and you are able to use the lift alone.

The MultiOne aerial work platform is attached to the MultiOne by the coupling plate. This makes it fast and easy to mount it on and take it off. Thanks to the small size and the maneuverability of MultiOne machines it is possible to reach even the most inaccessible

work sites. This portable platform is suitable for building repairs, painting, light bulb replacement, general maintenance, and more. The safe working load for the aerial work platform is 120 kg (265 lbs), which makes it ideal for one man and plenty of tools. This platform is a cost effective system that enables reaching working heights up to 9,8 m (32 ft). The platform is equipped with four adjustable support legs for stabilization even on very rough and not perfectly flat surfaces. It can be operated either directly from the basket or from the ground (in case of emergency). There is a safety valve that can be operated to bring the basket back to the ground in the event of a power failure.

Model	Platform height	(Lift Capaci	ty	Bas	ket siz	e	Wor hei	king ght	d	Tota limens		V	Veigh	t	Со	de
PID 10	7,8 m (25,6 ft)		120 kg 265 lb			x65 cm x25.6		9,8 m	(32 ft)		30x70 1.2x27			350 kg 772 lb:		C895	5151
Compa	tibility	^ ?	ک [.] ن	Ŋ.	45.	やジグ	6,3	√j.	8/7	80,0	dp	2/0	6350	13.KJ	ونجا	12 K	€1
(*) C890025 ad	dapter required							Very	compatil	ole		Compa	tible		No	t compatib	le

STREET WASHER



FEATURES & BENEFITS

- High water pressure
- The spray bars can be tilted up at 90°
- Includes a hand spray wand with 10 m (32 ft) hose on a storage reel
- High capacity tank

MultiOne Street Washer is the best solution for quickly cleaning public roads, town centers, car parks, market squares, large industrial areas, resort walkways, and wherever hygiene is required. The Street Washer combine low water consumption and high water flow and pressure. High pressure water takes dust, sand and debris out of asphalt, concrete and similar surfaces and doesn't therefore emit dust after drying. Low water consumption and high capacity tank make it possible to clean larger areas with a single pass. The

Street Washer is equipped with two foldable nozzle bars for street cleaning and a hand held washing gun with 10 m (32 ft) hose. The tank is equipped with a level indicator, a filter and a small separate water tank with a tap useful for wash the hands.

Model	Spray Bar Width	Tank Capacity*	Water pressure	Nozzles	Hose Length	Weight	Code
300	150 cm (59 in)	300 l (79.2 gal)	150 bar	3	/	60 kg (132 lbs)	C890750
600	250 cm (98.4 in)	600 l (158.5 gal)	150 bar	5	/	75 kg (165 lbs)	C890751
Hand spray	y wand				10 m (32.8 ft)	/	included

^(*) verify the lifting capacity of the machine

					(3)				-45		~0		3		.*	
Compatibility	√ .	J.3	NΩ	<i>₹</i> 2.7	ئرگرج	6,3	√,5	8'y	8,30	ďρ	1	6.351	13/2	diszn	15,€	₹1
Model																
300																
600																
(*) C890025 adapter required																

FLAIL MOWER WITH SIDE SHIFT



FEATURES & BENEFITS


- Hydraulic side shift and angle control flail mower
- Powerful attachment
- Equipped with direct drive hydraulic motor
- · ACI: control all movements on a fingertip

Use this hydraulically powered flail mower with side shift for heavy shrubs and weeds, and see what it can do! Not only is its heavy duty construction, combined with the power and stability of the MultiOne, perfect for use on slopes, it's also perfect for mulching in parks and other hard to reach places. Features:

- 1) Standard in-line front flail mower.
- 2) Offset length (174 cm / 68.5 in).
- 3) To -45° angle ditch mower.
- 4) To +90° angle bank and hedge mower.

Y blades ⁽¹⁾ comes standard, it can be equipped with Paddle Blades ⁽²⁾ (C035307) or Verticut ⁽³⁾ (C035312 + Y blade).

Notes: machine must be equipped with ACI. Suggested floating boom valve on machine.

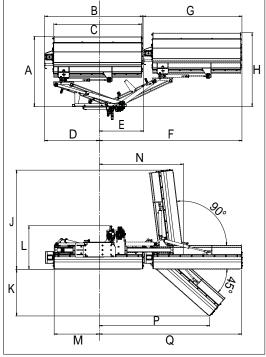

						Di	mensic	ns (cm	1 / in)						
Mod.	Α	В	С	D	E	F	G	Н	J	K	L	М	N	Р	Q
110	123	128	109	96	78	205	174	130	129	53	76	79	148	159	215
	48.4	50.2	42.9	37.8	30.6	80.9	68.4	51	51	20.7	30	31.2	58.1	62.7	84.6
125	123	143	124	96	78	220	174	130	144	63	76	79	148	170	230
	48.4	56.1	48.8	37.8	30.6	86.8	68.4	51	56.8	24.6	30	31.2	58.1	67.1	90.5

Model	Cutting Width	Tools	Rotation Angle	Max Side Shift	Weight	Code
110	100 cm (39.4 in)	20	+90° / - 45°	174 cm (68.5 in)	277 kg (610 lbs)	C890785
125	115 cm (45.3 in)	24	+90° / - 45°	174 cm (68.5 in)	300 kg (662 lbs)	C890786

					_ ^ე				√ √2.		0		350	-0	.*	
Compatibility	√.`	J.,5	N.J.	<i>√</i> 2,2	<i>ن</i> رکن	6,3	√ي.	8,4	Polici	ďρ	1/1	6.35	13/21	disp	15 V	₹1
Model																
110																
125																

FLAIL MOWER



FEATURES & BENEFITS

110

- Great cutting power
- Reliable and efficient
- Multifloat® floating system

Flail mower models - improve cutting result and require less power from the engine and hydraulics:

- Direct drive: hydraulic motor mounted directly on the shaft.
- Multifloat® system allows free vertical and orizzontal movement.
- Bigger roller in the rear better stability and less resistance when mowing.
- Longer and wider skid shoes on the sides.

Flail mower is a drum-type cutter, intended for cutting of long grass, scrub, bush and similar vegetation. It will cut up to 20 mm thick tree branches with ease.


Flail mower is the optimal cutting device for places where you need a lot of cutting power and a rougher cut will do. The most common applications for flail mower are places with taller vegetation like meadows, road banks, yard areas etc.. This mower capitalizes on MultiOne's best in class hydraulic power to deliver top performance.


Y blades ⁽¹⁾ comes standard, it can be equipped with Paddle Blades ⁽²⁾ (C035307) or Verticut ⁽³⁾ (C035312 + Y blade).

Note: suggested floating boom valve on machine.

Model	С	utting	Widt	h	Cuttin	g Hei	ight		Tools	S		We	ight		Cod	de
110	10	0 cm (39.4 i	n)	2-10 cn	n (0.8	-4 in)		20		12	22 kg	(269 ll	os)	C890	617
125	11	5 cm (45.3 i	n)	2-10 cn	n (0.8	-4 in)		24		14	15 kg	(320 II	os)	C890	618
155	1	45 cm	(57 in)	2-10 cn	n (0.8	-4 in)		32		16	52 kg	(357 ll	os)	C890	619
Compatibility	\\\\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\	ۍ. رئ	₩J.	⟨ ²) ²	るがゲ	<i>6</i> ,5	べ	8,4	90 is	dp	101	6.351	13/3	dish	2.X	
Model																

HEAVY DUTY FLAIL MOWER

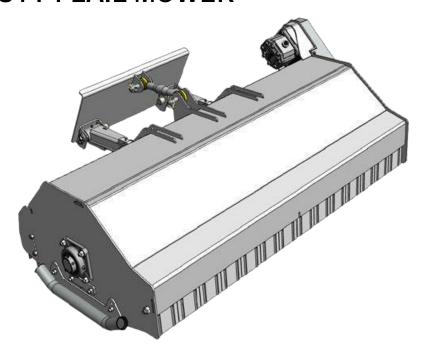



FEATURES & BENEFITS

- Heavy duty tools
- Perfect for thick grass, sticks, undergrowth and pruning residues, roadside maintenance
- New floating system

The Heavy Duty flail mower is now stronger and more powerful for maintaining more rugged landscape areas including heavy grasses, storm debris, sticks, pruning residues and more around farms, properties, parklands, and roadsides.

The hammer ⁽¹⁾ shaft set-up is especially designed to withstand to heavy works, such as cutting shrubs up to a diameter of 10 cm.

The rear support roller, adjustable in height, make this tool extremely effective and allow the operator to choose the desired cutting height.

The new floating system permits to follow the ground contours in an effective way also on uneven lawns.

Note: suggested floating boom valve on machine.

Model	Cutting Width	Cutting Height	Hammers 120 mm	Weight	Code
150	150 cm (59 in)	1-10 cm (0.4-4 in)	18	390 kg (860 lbs)	C890540



SIDE BOOM WITH FLAIL MOWER DZ1




FEATURES & BENEFITS

- · Excellent visibility of to the whole working area
- Compact with long reach capabilities

The side flail mower, combined with the power and stability of the MultiOne, makes it possible to reach places it is not safe to drive. This makes mowing side slopes, ditches, waterfronts, and other hard to reach areas safe and easy. Mowing road sides with the combination of a MultiOne and this mower is easier and more efficient than with larger machines.

The mower is equipped with proportional controls for smooth and exact movements of the boom and the flail mower. Compact size and low weight make it suitable for mounting also on the smaller MultiOne machines such as the 4 and 6 series. Y blades (1) comes standard, it can be equipped with Paddle Blades (2) (C035307) or Verticut (3) (C035312 + Y blade).

Note: suggested floating boom valve on machine.

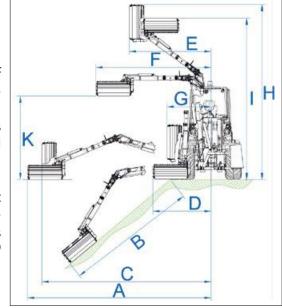

	Dimensions (cm / in)														
Model	Α	В	С	D	E	F	G	Н	I	K					
Flail mower 60	280	170	260	145	130	175	180	300	280	155					
	110	67	102	57	51	69	71	118	110	61					
Flail mower 80	300	190	260	165	130	195	180	320	280	155					
	118	75	102	65	51	77	71	126	110	61					

Boom Mower	Max. Extension	Cutting Width	Tools	Weight	Code
Boom mower DZ1 (*)	3 m (9.8 ft)	/	/	292 kg (644 lbs)	C890607
Flail mower 60 for boom	/	60 cm (23.6 in)	12	80 kg (176 lbs)	C890606
Flail mower 80 for boom	/	80 cm (31.5 in)	16	105 kg (232 lbs)	C890611

(*) C890611 or C890606 required

				رىم				~\for		40	دی	350	دی	*	
\\.\.	<i>S</i> ,5	N.J.	45€	27,1	6.3	√ي	8,4	2,10	ďρ	1/1	637	1312	d ₂₂	15 X	₹1
				V V V		V, V3 Ky Py 21, P3	V, V3 K3 K3 A3	1, 3, 13, 63, 41, 63, 43, 6y	1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1	1, 3, 13 (3) (4) (4) (4) (4) (4) (4)	1, 3 ky Py Py Py Py Py Py Py Py	1, 3, 13 PJ PJ PJ P3 J3 PV PJ DP J4 P32	1, 3 Ky 2y 24y P3 13 By Rais do 11 Page 18 Kg	1, 3, 13 PJ PJ PJ P3 13 BW PJ PD 11 P3P PP PP PP	1, 3 Ky 2y 24y P3 13 8y 24y dp 1, P32, 13kg 12kg 12kg 12kg 17y

SIDE BOOM WITH FLAIL MOWER DZ2



FEATURES & BENEFITS


- · Excellent visibility of to the whole working area
- Compact with long reach capabilities

MultiOne's side flail mower lets you reach the cutting head into waterfronts, ditches, steep slopes, and other hard to reach areas safely. This mower uses lets you choose between two flail mowers for tough brush.

The mower is equipped with proportional controls for smooth and exact movements of the boom and the flail mower. The DZ2 model is suitable for mounting on MultiOne machines, from series 7 to 10.

Y blades ⁽¹⁾ comes standard, it can be equipped with Paddle Blades ⁽²⁾ (C035307) or Verticut ⁽³⁾ (C035312 + Y blade).

Note: suggested floating boom valve on machine.

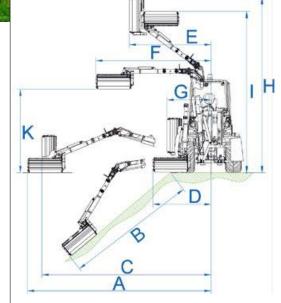

	Dimensions (cm / in)														
Model	Α	В	С	D	E	F	G	Н	I	K					
Flail mower 80	315	190	265	185	155	215	135	375	325	135					
Tidii Tilovici oo	124	74.8	104.3	72.8	61	84.6	53.1	147.6	128	53.1					
Flail mower 100	335	210	265	205	155	235	135	395	325	135					
riali mower 100	132	82.7	104.3	80.7	61	92.5	53.1	155.5	128	53.1					

Boom Mower	Max. Extension	Cutting Width	Tools	Weight	Code
Boom mower DZ2(*)	3,35 m (11 ft)	/	/	486 kg (1072 lbs)	C890600
Flail mower 80 for boom	/	80 cm (31.5 in)	16	105 kg (232 lbs)	C890611
Flail mower 100 for boom	/	100 cm (39.4 in)	20	155 kg (342 lbs)	C890612

(*) C890611 or C890612 required

				<i>,</i> %_				√ √.		0	-0	350	-0	*	
√,`	√.5	N	45.7	J.J.	6.5	√ي.	8'y	P. D.	ďρ	`\`	6.35	13/21	disp	15 V	₹1
						V, V3 Y3 P3 P3 P3	V, V; W, P, P, A, P; V;	1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1	1, 3, ky 2, 31, P3 1, 8k Q3,	1, 3 13 63 01 03 13 81 02 0p	1, 3, 1, 0, 3, 1, 0, 1, 0, 0, 0, 0, 0	1, 3, 13 PJ PJ PJ PJ PJ PJ PJ	1, 3, 1, 0, 3, 1, 0, 1, 0, 0, 0, 0, 0, 1,	1, 3, 13 ey ay, ey dy dp 1, ey dy	1, 3, 1, 0, 3, 1, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,

TORNADO LAWN MOWER



FEATURES & BENEFITS

- · Powerful lawn mower with internal clipping catcher
- Can also be used to collect tree leaves on lawns
- New floating system guarantees easy operation and good mowing result also on uneven lawns
- Low noise emissions and not dust
- Rounded edges less damage to trees, buildings etc. in case of contact
- Automatic stop valve stops the blades when the Tornado is lifted off the ground

Designed for professional level green space maintenance, the MultiOne Tornado mower with the internal clipping catcher

effectively cuts dry and wet grass. Using the patented MultiOne Tornado, in a single pass you can cut, pick-up, and collect the clippings in the internal catcher with no noise or dust.

The blades of the mower crush the grass clippings, leaves etc. into a very fine material which then moves to the collector. The cutting waste is ideal material for composting. Collector capacity is as big as 250 litres, which enables cutting of small to medium sized areas. Emptying of the collector is very easy: lift the mower up from the ground with MultiOne's boom and then tilt the mower downward so much that the grass waste pushes the lid open and the waste comes out. The collector can be easily unloaded directly into a trailer. Thanks to its excellent suction power collecting of leaves from the lawns is also possible.

Note: suggested floating boom valve on machine.

Model	Cutting Width	Volume*	Cutting height	Blades	Weight	Code
Tornado 120	120 cm (47.2 in)	250 I (8.8 ft ³)	1-12 cm (0.4 – 5 in)	3	210 kg (463 lbs)	C890643
Tornado 150	150 cm (59 in)	250 I (8.8 ft ³)	1-12 cm (0.4 – 5 in)	3	220 kg (485 lbs)	C890647

(*) verify the lifting capacity of the machine

Compatibility	\\\.\.\.\.\.	J.,	₩J.	<i>₽</i> .	^{ري} رځ رې	ρ.,	ر _ي	8,4	8,4,2 8,5,42	ďp	107	6.351	13,150	dish	√3' _¥	€1
Model																
120																
150																
(*) C890025 adapter required							\ /		L. I.		0	49.1.		NI-4		1.

() C890025 adapter required Very compatible Compatible Not compatible

LAWN MOWER



FEATURES & BENEFITS

- Equipped with automatic stop valve
- Floating system guarantees easy operation and good mowing result also on uneven lawns
- · Rear or side discharge as standard, mulching kit available as an option
- Four puncture free tires

130

Ideal for fine cut applications, such as golf courses and large acreage mowing. The mower has been designed with three blades (two blades on mod. 100) that cut with an overlap that prevents uncut strips.

MultiOne's extensive design experience makes the mower very reliable and assures a high quality cut. The independent four wheel support of the mower frame allows the mower deck to follow ground contours. It is equipped with the MultiOne floating system, which guarantees optimal touch with the ground also on uneven lawns. The mower is also equipped with a automatic stop valve which stops the blades when the mower is lifted off the ground. Moreover, thanks to the MultiOne telescopic boom, it is possible to cut the grass even under trees and bushes where the conventional mower could not reach. The mower mod. 100 is mulching type as standard. Mulching kit is available as an option on model 130, 150 and 180.

Note: suggested floating boom valve on machine

Note: suggested floatil	ig booii	i vaiv	e on	macı	iiiie.										
Model					Widtl	h	Cu	tting	Height	:	We	ight		Cod	le
Lawn mower 100 with m	nulching	syste	em	100	cm (39	9.4 in)	1-12	cm (0	.4 – 5 i	n) 1	16 kg	(256 ll	bs)	C895	081
Lawn mower 130 with re	ear discl	narge		130	cm (5°	1.2 in)	1-12	cm (0	.4 – 5 i	n) 1	70 kg	(375 ll	bs)	C890	636
Lawn mower 150 with ri	ght side	disch	narge	150	cm (5	9 in)	1-12	cm (0	.4 – 5 i	n) 2	07 kg	(457 ll	bs)	C890	632
Lawn mower 180 with le	awn mower 180 with left side discharge 180 cm (70.8 in) 1-12 cm (0.4 – 5 in) 240 kg (529 lbs) C 8													C890	638
Options			_												
Mulching kit for lawn me	ower 13	0									20 kg	(44 lb:	s)	C890	631
Mulching kit for lawn me	ower 15	0									21 kg	(47 lb:	s)	C890	633
Mulching kit for lawn me	ower 18	0									25 kg	(55 lb:	s)	C890	635
Compatibility) \\ \frac{1}{2}	NJ.	<i>₹</i> 3.}	<i>و</i> رځ	<i>6</i> .5	ري.	8,1	80,0	dp	107	6351	13/3	450	√5,*	€1
Model															
100															

150
180

(*) C890025 adapter required

Very compatible

Compatible

Not compatible

SPIKE AERATOR



FEATURES & BENEFITS

- Quick and efficient operation
- Suitable for sandy or loamy soils
- Equipped with knife type blades

The spike aerator is completely mechanical and it cuts and penetrates the ground surface using the wedge shaped spikes. The cut slots enable air, fertilizer, and water to effectively reach the lawn roots in sandy or loamy soils. The open slots quickly close after water causes the compacted soil to expand.

Spike penetration depth is easily controlled using the two guide wheels, providing consistent results.

The spike aerator is also equipped with mechanical support legs which lift the blades off the ground for storage.

It is the ideal attachment for gardens and sports fields maintenance where MultiOne machines, thanks to their traction system, don't damage the turf.

Note: suggested floating boom valve on machine.

Model	Wor							Depth		Weight					Code		
Spike Aerator	130	cm (5°	1.2 in)			10 c	m (4 ir	1)		300) kg (6	662 lb:	s)	C	C890446		
Compatibility	^`	√, √3 ×y <2√					(2) 63 43 8W 8A				35 90 19 138					♦	
(*) C890025 adapter required					Very compatible				ble	e Compatible					compatib	le	

CORE AERATOR



FEATURES & BENEFITS

- · Holes stay open for a long time
- · Suitable for heavy clay soils

The core aerator penetrates the ground pulling plugs of grass and soil from the ground, leaving the plugs behind. The holes created enable air, fertilizer, and water to effectively reach the lawn roots in heavy clay soils.

Core aerator penetration depth is easily controlled using the two guidewheels, providing consistent results.

The spike aerator is also equipped with mechanical support legs which lift the blades off the ground for storage.

It is the ideal attachment for gardens and sports fields maintenance where MultiOne machines, thanks to their traction system, don't damage the turf.

Note: suggested floating boom valve on machine.

Model	Worki	ing W	idth		Max	Worl	cing D	epth		Weight					Code		
Core Aerator	130 cr	n (51.	2 in)			10 cn	n (4 in)			300) kg (6	62 lbs	s)	C	8904	45	
Compatibility	^`	کئی	₩.	43.7	رين نين	<i>ې.</i>	√ÿ.	8,1	80,0	35 00 1/4 035 135/6				d is so	12.K	€	
(*) C890025 adapter required							Very compatible			Compatible					Not compatible		


HEDGE CUTTER



FEATURES & BENEFITS

- Cut angle electrically adjustable
- Time saving attachment
- Very high cutting quality
- Cutting bar is suitable for cutting fine leaves, as well as heavy growth

The hedge cutter is the perfect attachment for hedge cutting. The combination of the cutters arm angle adjustment and the MultiOne's boom reach provides excellent reach. Through using the speed and flexibility of the MultiOne, cutting straight hedge profiles is quick and easy. Cutting bars available with 1 cm (0.4 in) or 3 cm (1.2 in) max. cutting branches diameter. Max. side shift 45 cm (17.7 in).

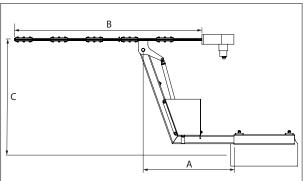

		Dimensio	ns (cm/ir	1)
Mod.	A (min)	A (max)	В	С
10 - 160	35/13.8	80/31.5	160/63	100/39
30 - 160	35/13.8	80/31.5	160/63	100/39
10 - 210	35/13.8	80/31.5	210/83	100/39

Model	Hedge cutter length	Max. cutting diameter	Slewing angle	Weight	Code
Frame only (C890666, C890667 or C890668 required)	/	/	/	47 kg (104 lbs)	C890665
Hedge cutter 10 - 160 (C890665 required)	160 cm (63 in)	1 cm (0.4 in)	120°	34 kg (75 lbs)	C890666
Hedge cutter 30 - 160 (C890665 required)	160 cm (63 in)	3 cm (1.2 in)	120°	40 kg (88 lbs)	C890667
Hedge cutter 10 - 210 (C890665 required)	210 cm (83 in)	1 cm (0.4 in)	120°	44 kg (97 lbs)	C890668

6351	6351	13/2	4/221	15/1	♦

(*) C890025 adapter required Very compatible Compatible Not compatible

SICKLE BAR MOWER



FEATURES & BENEFITS

- Robust and economical long hay cutter
- Compact dimensions
- Cost effective
- Fast

The MultiOne hydraulically powered sickle bar mower has been designed to quickly and effectively cut long grasses and hay on fields, meadows, and road banks.

Thanks to its small size it is easily transportable and can be used in hard-to-reach areas.


It is equipped with two blades, one fixed and one mobile. The sickle bar mower is ideal for cutting these grasses which can be harvested in a secondary process.

It is equipped with two adjustable skids to set the cutting height.

Note: suggested floating boom valve on machine.

Model							1	Width	1		We	ight			Code	
145							145	cm (5	7 in)	8	3 kg (183 lk	os)	C8	3906	53
165							165	cm (6	5 in)	9	3 kg (205 lk	os)	C8	3906	54
Compatibility	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	J.;	NJ.	ئ ئ	かが	ار. ري	√ي. م	8,4	80,0	ďρ	107	6.351	13/30	4550	√2,*	€1
Model																
145																
165																
(*) C890025 adapter required							Very	/ery compatible		Compatible				Not compatible		

TELESCOPIC SIDE ARM M1-15

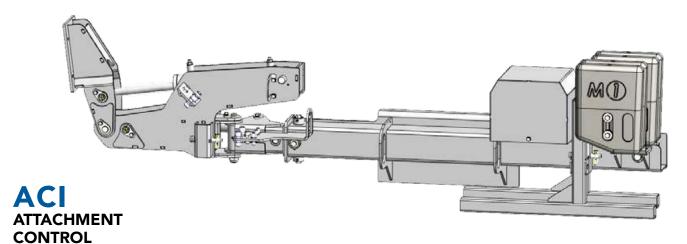

FEATURES & BENEFITS

INTERFACE


- Outreach to side up to 3,72 m
- · Easy mowing or trim on the right side
- · ACI: control all movements on a fingertip

The telescopic side arm is equipped with a straight telescopic arm and a tilting jib arm. The telescopic arm extends 1,05 m hydraulically to the side, and the jib arm movement is 45° down and 90° up from the horizontal position.

The attachment, mounted on the side arm, will give in backward when it hits an obstacle. The side arm will come back to normal position as soon as the obstacle is out of the way.

MultiOne rear side weight C883077 it is necessary.

Note: machine must be equipped with ACI

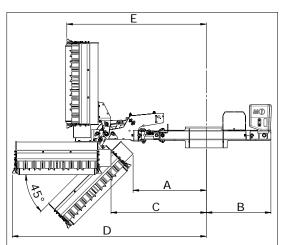

	Dimensions	(cm / in)
	C890612	C890950
Α	98-203 / 38.5-80	102-207 / 40-81.581.5
В	87 / 34.5	87 / 34.5
С	128-233 / 50.5-91.5	117-222 / 46-87.5
D	260-365 / 102.5-143.5	267-372 / 105-146.5
Е	187-292 / 73.5-115	162-267 / 64-105


Model	Max. Offset	Cutting Width	Max. cutting diameter	Tools	Weight	Code
Telescopic Side Arm M1-15 (*)	105 cm (41.5 in)	/	/	/	250 kg	C890551
Branch cutting bar 150 (**)	/	150 cm (59 in)	5 cm (2 in)	/	155 kg (342 lbs)	C890950
Flail mower 100 (**)	/	100 cm (39.4 in)	2 cm (0.8 in)	20	155 kg (342 lbs)	C890612
Options						
Rear side weights 160 kg	/	/	/	/	160 kg (352 lbs)	C883077

(*) C890950 or C890612 required (**) C890551 and C883077 required

			_		ر _ئ ي م	_			90,i		10	ري.	~25.50	ري	_ *	
Compatibility	1.	<i>S</i> . S.	NJ	47.	7.	6,3	7,5	8'y	,d;	dp	\ <u>`</u>	6.5	1.81	0,5	V	₹\\
M1-15 with:																
Branch cutting bar 150																
Flail mower 100																
(*) C890025 adapter required							Voru	compatil	alo		Compo	tiblo		Note	compatible	

() C890025 adapter required Very compatible Compatible Not compatible

ARTICULATED SIDE ARM M1-30

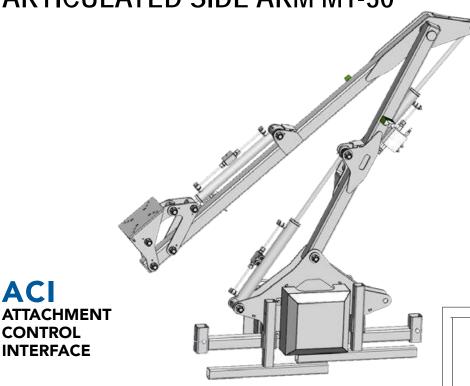


FEATURES & BENEFITS

- · Cut on either side
- Four cutting options
- · ACI control: all movements on a fingertip

Compact, light and maneuverable, the articulated side arm M1-30 has been designed for contractors, municipalities and estate managers working in landscape and ground-care sectors. From grass cutting to tree trimming the articulated side arm M1-30 can do it all tanks to the differents end tools like Hedge cutter, Hedge trimmer and Flail mower.

It's the ideal reach mower to operate in very narrow spaces for hedge trimming or mowing with the freedom to cut on either side of the MultiOne compact loader.

Note: machine must be equipped with ACI

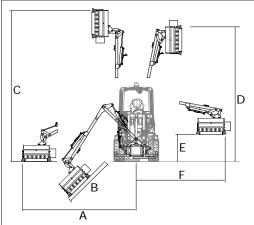

	230 / 90.5 204 / 80.5 136 / 53.5 504 / 198.5 478 / 188 410 / 161.5 365 / 143.5 115 / 45.5 73 / 28.5								
	C890666/7	C890671	C890606						
Α	403 / 158.5	377 / 148.5	309 / 121.5						
В	230 / 90.5	204 / 80.5	136 / 53.5						
С	504 / 198.5	478 / 188	410 / 161.5						
D		365 / 143.5							
Ε	115 / 45.5	73 /	28.5						
F		241 / 95							

Model	Max. Extension	Cutting Width	Max. cutting diameter	Tools	Weight	Code
Articulated Side Arm M1-30(*)	3 m (9.8 ft)	/	/	/	292 kg (644 lbs)	C890940
Hedge cutter 10 - 160 ^(**)	/	160 cm (63 in)	1 cm (0.4 in)	/	34 kg (75 lbs)	C890666
Hedge cutter 30 - 160 ^(**)	/	160 cm (63 in)	3 cm (1.2 in)	/	40 kg (88 lbs)	C890667
4 Heads 140 Trimmer ^(**)	/	140 cm (55 in)		/		C890671
Flail mower 60 (**)	/	60 cm (23.6 in)	2 cm (0.8 in)	12	80 kg (176 lbs)	C890606

(*) C890666 or C890667 or C890671 or C890606 required (**) C890940 required

Compatibility	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	ک _. ن	NJ.	<i>₽</i> .y	かがか	<i>ۇ</i> نى	√.ÿ.	8,4	9.4.i	ďρ	107	6.351	13,50	9/35	√2, [*]	<√
M1-30 with:																
Hedge cutter 10 - 160																
Hedge cutter 30 - 160																
4 Heads 140 Trimmer																
Flail Mower 60																

(*) C890025 adapter required Very compatible Compatible Not compatible

LANDSCAPE POT CLAMP



FEATURES & BENEFITS

- The easiest way to lift and transport potted or balled plants, trees, barrels, and more without causing damage.
- Excellent tool for nurseries and landscapers

The MultiOne pot clamp is designed to lift and transport round objects, such as potted or balled plants and trees, barrels, and more without causing damage. Grabbing force can be adjusted by a valve, which means all kinds of objects can be handled without damaging them. It is the ideal attachment for the nurseryman who, thanks to the small size of the Multione machine, can transport both the plant pots and the machine on the truck or trailer to make the unloading at the delivery place simply and quickly.

Model	ľ	Max lo	ad	ſ	Min O	penin	g	Max	Open	ing		Weig	ht		Code	
Lanscape pot clamp	650	550 kg (1433 lbs)			25 cm	(9.8 ir	ո)	120 c	m (47.	2 in)	80	kg (17	'6 lbs)	C	8907	721
Compatibility	√ ?			<i>⇔</i> ,}	ويزن	<i>لون</i> ي	√,5	8,4	80,0	875 96 19 1350		13/130	die	12 × 1×	♦	
(*) C890025 adapter required	ed						Ve	ry compati	ible		Compa	ntible		Not	compatib	le

SPRAYER



FEATURES & BENEFITS

- Fast application for large areas
- Flow and pressure adjustable
- Foldable spray bar
- · Equipped with a hand held spray wand with a 50 m (165 ft) hose

The hydraulically powered MultiOne sprayer is the proper attachment for the fast and efficient application of landscaping chemicals. NOTE: MultiOne recommends that the operator wear the appropriate personal protection equipment when handling and applying landscaping chemicals.

The foldable 4,5 m (14.75 ft) wide spray bar, combined with the 120 I (31.7 US gal) tank allow for fast coverage of large areas. Spray nozzles are replaceable and adjustable to assure the proper material application, making this system ideal for landscape and grass area maintenance.


This unit comes standard with a 50 m (165 ft) hose reel with an application wand and nozzle. It is also possible to reach the most inaccessible places, such as the tree tops. System pressure and flow are adjustable to meet application requirements. There are an filter and a small separate water tank with a tap useful to wash the hands.





Mode	Capacity*	Max Pressure	Spraying Bar Width - Opened	Spraying Bar Width - Closed	Hose reel	Weight	Code
Spray	er 120 l (31.7 gal)	40 bar	450 cm (177.2 in)	150 cm (59 in)	50 m (164 ft)	65 kg (144 lbs)	C890740

(*) verify the lifting capacity of the machine



Very compatible

STRING SHOOT REMOVER



FEATURES & BENEFITS

- · Low wear cutter string
- Variable offset (+-25 cm)
- Efficient and reliable

The MultiOne shoot remover is an ideal tool for the removal of weeds and plant shoots from around trees. Hydraulically powered, it gently removes the shoots without causing tree trunk damage.

The shoot remover frame can be offset to the right to allow for variable working conditions. Replacement of the long lasting rubber strings is quick and easy.

	Dimensions (cm/in) A B C D E F G 75 116 91 82 49 49 70												
Α	В	С	D	E	F	G							
75	116	91	82	49	49	70							
29.4	45.7	35.8	32.3	19.3	19.3	27.6							

Model		Rotor Length				Off	set M	ах			Weig	ht		(Code	
String shoot Remove	r	52 cm (20 in)				141	l cm (in)		50	kg (11	0 lbs)		C8	9043	36
Compatibility	1, J3 P3 P3 P3		رى <u>/</u> ن رىپى	6,3	رئ	8,4	00'i	dp	2/1	6.351	13,60	akish	√5,K	€₹		
C890025 adapter required			Very compatible			ble	e Compatible				Not compatible					

DUAL BLADE HEDGE TRIMMER




FEATURES & BENEFITS

- · Dual cutting action saves time
- · Completely adjustable
- Easy to control

The hydraulically powered dual blade hedge trimmer allows the top and sides of vine rows and large plants to be cut simultaneously. Each frame and cutter assembly is independently adjustable, and the MultiOne's boom provides additional flexibility and control. The inclination of the horizontal cutting bar can be adjusted manually and there is an electric actuator which allows the simultaneous adjustment of the inclination of both cutting bars directly from the driver's seat. It is equipped with support legs to position it during periods of non-use.

The frame can be offset to the right (max. 40 cm - 15.7 in) to allow for variable working conditions.

	Din	nension	s (cm/ir	1)	
Α	В	С	D	Е	F
74	160	710	78°	28°	250
29	63	/ 1	/0	20	25°

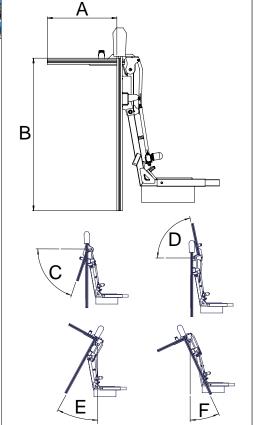

Model	Vertical Bar Length	Horizontal Bar Length	Max Right Side Shift	Max. cutting diameter	Weight	Code
Double Blade Hedge Trimmer	160 cm (63 in)	74 cm (29,1 in)	40 cm (15.7 in)	1 cm (0.4 in)	160 kg (353 lbs)	C890441

Compatibility	\ ?	ر ي.	ďΣ	<i>جي</i> .ک	^م رئ ئن	<i>P.</i> 3	ر _ي	8,14	80,0	ďρ	10/1	6.351	13/19	45	1. N. X. X.	€Ī.	

INTER-ROW MOWER




FEATURES & BENEFITS

- Spring shock absorber system
- · Abrasion resistant guard
- Floating system

The inter-row mower is designed to cut grass and shrubs around trees, guard rails, traffic signs, and other obstacles. The floating mower system allows the mower disk to automatically follow ground contours. This system provides excellent productivity and an even cut. The inter-row mower disk can be offset to the right to allow for variable working conditions. It is equipped with a hydraulic valve that prevents blades rotation inversion.

Note: suggested floating boom valve on machine.

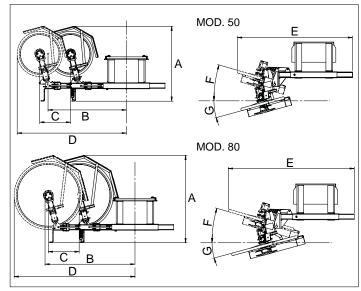

		D	Dimension	ns (cm/in)			
	Α	В	С	D	E	F	G
Mad EO	97	102	40	142	149	16°	15°
Mod. 50	38.2	40	15.7	55.7	58.6	10	13
Mad 00	113	117	40	157	163	140	15°
Mod. 80	44.6	45.9	15.7	61.6	64.3	16°	15

Model	Mowing d	isk dia	amete	r	Ma	x Side	Shift		Nr. B	Blade		W	eight/			Code	е
50	48 cm	(18.9	in)		40	cm (1	5.7 in)		2	2		108 kg	g (238	lbs)	C	8907	' 05
80	80 80 cm (31.5 in)				40	cm (1	5.7 in) 2 115 kg (254 lbs)					С	C890706				
Compatibility 💸 🔉 🔉			⟨~.}	رب ري	<i>ي</i> .	ر _ي خ	8/7	80,60	ďρ	107	6.351	13.150 13.150	d is ju	√5/ _¥	♦		
Model																	
50																	
80	80																
(*) C890025 a	C890025 adapter required							Vor	v compati	ihla		Compa	atible		Not	compatib	ما

() C890025 adapter required Very compatible Compatible Not compatible

STAINLESS STEEL TIPPING DUMPER



FEATURES & BENEFITS

- High capacity
- For fruit and vegetables
- Hydraulic dumping

The MultiOne stainless steel tipping dumper is designed for grape, fruit, and vegetable transportation. Two hydraulic cylinders tip the container for unloading into trucks or boxes. Using the MultiOne's boom, the tipping dumper can reach almost any dumping position. The tipping dumper is also equipped with mechanical support legs which lift the dumper off the ground for storage.

Model	Max Load*	Width	Weight	Code
Stainless steel Tipping Dumper	400 kg (882 lbs)	120 cm (47,3 in)	180 kg (397 lbs)	C890430

(*) verify the lifting capacity of the machine

Compatibility	\ ?	√.,	⋈ ∑	⟨ √ ⟩.	^{ري} رن ښ	β.,	くぶ	8 [,] A	9,4,2 6,2,42	ďp	107	6.351	13,130	4550	√2, [*]	♦
(*) C890025 adapter required							Verv	, compati	hle		Compa	atible		Not	compatib	le

TREE SHAKER WITH COLLECTOR



FEATURES & BENEFITS

- Total control of vibration frequency (up to 40 Hz)
- Operates on trees with wide trunk
- Harvest collector, 5 m (16.4 ft)
- Shaker vibrating head tiltable (± 40°)

The tree shaker attachment incorporates the most advanced harvest technology for olives, almonds, nuts, pistachio, etc. The shaker requires a minimum distance of 70 cm (27 in) from the soil to the foliage. The adjustable vibration frequency maximizes the effect on the fruit, avoiding low frequency vibrations on the trunk. Depending on ground conditions, as many as 40 to 60 trees can be processed per hour. The hydraulically controlled collector has a diameter of 5 m (16.4 ft), capturing fruit from large trees and is equipped with a hydraulically opening hatch through which is possible to unload the product collected directly on trucks or trailers. The shaker vibrating head is powered by a compact hydraulic motor and it is tiltable to the right and to the left (± 40°). The shaker's controls are located near the operator's seat, and

controls all movements and vibration frequency.





Model	Trunk diameter	Capacity*	Diameter	Weight	Code
Shaker vibrating head	0-35 cm (0-13.8 in)	/	/	330 kg (727 lbs)	C891000
Collector	/	300 kg (660 lbs)	5 m (16.4 ft)	180 kg (397 lbs)	included

(*) verify the lifting capacity of the machine



VINEYARD SPRAYER



FEATURES & BENEFITS

- · High pressure, hydraulically powered pump
- Polyethylene tank
- Clean water tank for hand washing

The Vineyard Sprayer is a versatile sprayer suitable for vineyard spraying, weed-killing in open-field growing, inter-row weed-killing.

The spray bars can be rotated and adjusted in height. The nozzles are specifically designed to spray efficiently and without product waste. The high capacity tank is equipped with a level indicator and allows long work sessions without the need to stop for refueling. The pressure is adjustable and there is an anti-clogging filter and a small separate water tank equipped with a tap, useful for washing hands.

Note: MultiOne recommends that the operator wear the appropriate personal protection equipment when handling and applying landscaping chemicals.

Model	T	ank C	apacit	:y*	Nozzle	es	1	Max Pressur	е	٧	Veight		C	ode	
Vineyard Sprayer	2	200 l (5	52.8 g	al)	4+4			40 bar		90 kg	j (198 lk	os)	C89	0741	
(*) verify the lifting capacity of the	mach	ine													
					0					_	a (-Q-	_ [1	ſ

Compatibility	\?\	λ ² ,	₩J.	45.	^{ري} رځ	ئن.	لې	8,4	80, is	dp	102	6.351	1399	dish	√5,*	♦
(*) C890025 adapter required							Von	, compat	blo		Comp	stible.		Not	aamnatih	

*) C890025 adapter required Very compatible Compatible Not compatible

VINEYARD TOOL CARRIER




FEATURES & BENEFITS

- Multifunction tool
- 6 professional attachments for vineyards
- Suitable for rows from 200 cm (6.5 ft) wide

MultiOne's vineyard tool carrier is a multifunctional tool carrier for a wide range of vineyard attachments.

This tool carrier for vineyard is equipped with an electro-hydraulic distributor with 4 functions (roll back / tilt head / side extension / height) operated through a joystick positioned in the operator's cab. An hydraulic system roll the tool

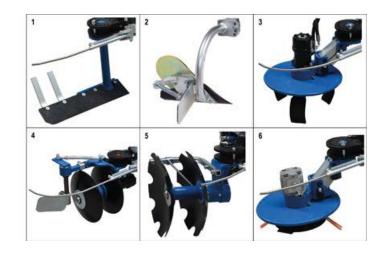

back to avoid damages to plants. Note: suggested floating boom valve on machine.

M	odel	Diameter /Blade Length	Min. Row Width	Weight	Code
Vi	neyard tool carrier (base machine)	/	200 cm (78.74 in)	220 kg (485 lbs)	C890760
1	Blade Weeder (*)	50 cm (19.68 in)	/	25 kg (55 lbs)	C890763
2	Plough roots bare blade (*)	26 cm (10.23 in)	/	25 kg (55 lbs)	C890766
3	Power Harrow unit 4 blades (*)	40 cm (15.74 in)	/	35 kg (77 lbs)	C890761
4	Disk roots bare (*)	36 cm (14.17 in)	/	30 kg (66 lbs)	C890764
5	Disk roots prop (*)	46 cm (18.11 in)	/	30 kg (66 lbs)	C890765
6	Disk Mower, blades and wires (*)	40 cm (15.74 in)	/	35 kg (77 lbs)	C890762

(*) C890760 required



LEVELER



FEATURES & BENEFITS

- Economical attachment to level gravel and other soils
- Eliminates almost all manual shoveling and grading at job sites


A simple and inexpensive but incredibly useful and efficient attachment for levelling and planing of larger areas. With MultiOne leveller you can easily and quickly level sand, mulch etc. The leveller is most commonly used in:

- Preliminary lawn bed levelling
- Yard sand levelling
- Driveway levelling

The leveller can also be used for lifting job site light materials like sod rolls, tools etc.

Model		Wi	dth				Leng	gth			1	Veigh	t			Code	
Leveler	15	0 cm	า (59 i	n)		105	cm (41.3 ir	1)		130 l	(g (28	7 lbs)		C8	3901	00
Compatibility		^ :	J _y	kJ.	47	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \				80,0	dp	12/2	6.351	13/19	diè	√2,*	♦
(*) C890025 adapter require	ed					And the second of the second o						Compa	atible		Not	l compatib	le

ROLLER

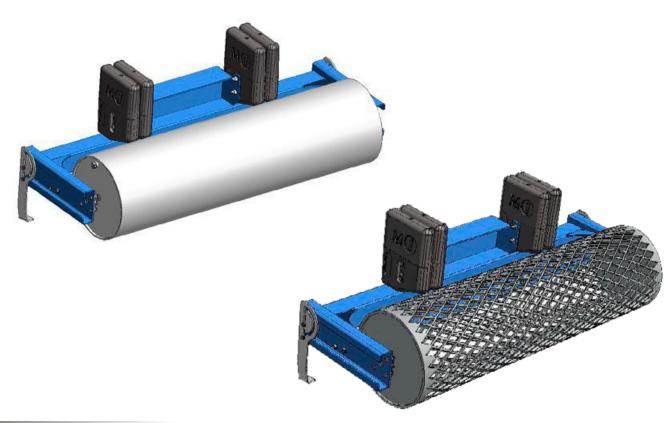

FEATURES & BENEFITS

- Perfect attachment to compact soils
- Weights can be added to increase compaction
- Two models: mesh and fillable

A simple and inexpensive but incredibly useful and efficient attachment for levelling and compacting of larger areas.

With MultiOne leveller you can easily and quickly level sand, mulch etc.

The leveller is most commonly used in:

- Preliminary lawn bed levelling and compaction;
- Yard sand compaction;
- Driveway levelling and compaction.

Model			Vo	lume		Wo	orking	Widt	:h	1	Neigh	ıt		С	ode	
Plain roller fillable			178 l	(47 ga	al)	15	0 cm	(59 in)	165 l	kg (36	4 lbs)		C89	0930)
Mesh roller				/		152	2 cm (59.8 iı	n)	170 l	kg (37	5 lbs)		C89	093°	1
Options																
Rear side weights 16	60 kg			/			/			160 l	kg (35	2 lbs)		C88	307	7
Compatibility	<u>``</u>	J.;s	Ņ.	<i>چې</i>	わ か う う	رئي	√,	8 [,] A	80,0	dp	101	6351	13 Kg	a fissil	√5' _¥	£1
Model																
Plain roller fillable																
Mesh roller																
(*) C890025 adapter required							Very	compati	ible		Compa	atible		Not	compatib	le

RIPPER



FEATURES & BENEFITS

- An inexpensive tool for removing of rocks, tree stumps, roots etc. from the ground
- · Eliminates a huge amount of manual work

The ripper is an inexpensive and practically irreplaceable tool in ground works. With the ripper it is easy and effortless to remove roots as well as rocks even from hard packed ground. The ripper teeth are 30 cm (12 in) long for deep surface penetration and guarantee a long lifespan for the attachment.

The ripper is operated by pressing the three teeth into the ground next to the object you wish to remove. When the teeth have sunk into the ground, tilt the ripper inwards and then lift the boom upwards which will bring the object on top of the ground.

Model	V	Vorkir	g de	oth		\	Vidth				Weig	ht		(Code	
Ripper	3	30 cm	(11.8	in)		50 cr	n (19.	7 in)		23	kg (5°	1 lbs)		C8	9122	20
Compatibility	\^ :	V, V3 M3 P3 P3				رئ	7,5	8,4	80,0	dp	107	6.351	13,13	dis Sil	V _X	€₹
(*) C890025 adapter required						_	Very	compati	ible		Compa	atible		Not (compatibl	le

ROTARY TILLER



FEATURES & BENEFITS

- Reliable, heavy duty
- · Adjustable soil scraper blade
- · Adjustable working depth

The heavy duty MultiOne rotary tiller is the ideal tool for preparing the soil for seeding or planting, even in tough conditions and hard soils. In one pass, the hydraulically powered tiller breaks up the soil, weeds and scrub growth are uprooted, and the soil is leveled.

The solid frame and the chain transmission ensure durability and reliability. The small dimensions combined with the agility of the MultiOne machines make it an ideal attachment for narrow spaces. **Note: suggested floating boom valve on machine.**

Model	Working Width	Working depth	Blades	Weight	Code
105	105 cm (41.3 in)	0 - 15 cm (0- 6 in)	20	140 kg (309 lbs)	C890490
125	125 cm (49.2 in)	0 - 15 cm (0- 6 in)	24	150 kg (331 lbs)	C890491
145	145 cm (57 in)	0 - 15 cm (0- 6 in)	28	160 kg (353 lbs)	C890492
	***************************************	***************************************			

Compatibility	`	گ _ن ی	٣'n	<i>₹</i> 3.}	^{مر} ئ من	6,3	Λ̈́̈́	8,4	8,42 8,52	ďρ	107	6.351	13,13	d is in	√2, [*]	<√2
Model																
105																
125																
145																
(*) C000025 adaptor required																

(*) C890025 adapter required Very compatible Compatible Not compatible

POWER HARROW



FEATURES & BENEFITS

- · Professional, efficient rotary harrow for topsoil levelling
- Top grade finish with just one pass
- Can be equipped with seeding unit ready lawn surface in a single pass

MultiOne power harrow is an excellent leveler for lawn beds, yards, gardens etc. – for places where the ground needs to be perfectly levelled. It harrows only the topsoil and gives a very nice finish for sowing. Working depth is adjusted with the rear field roller which levels the seeding bed during operation.

With the optional seeding unit you are able to make a ready lawn surface on one pass. Power harrow is most commonly used for lighter topsoil levelling.

Note: suggested floating boom valve on machine.

Model	Worki	ng Wi	dth	\ \	Vorki	ng De	pth		Blade	es	,	Weig	ht		Code	
110 w/roller	110 cn	n (43.3	in)	0	- 18 c	:m (0-	7 in)		10		211	kg (46	55 lbs)	C	3905	20
130 w/roller	130 cn	n (51.2	in)	0	- 18 c	m (0-	7 in)		12		226	kg (49	98 lbs)	C	3905	21
150 w/roller	150 c	m (59	in)	0	- 18 c	m (0-		248	kg (54	17 lbs)	C	3905	22			
Options																
Seeding unit for		er harrow 110 70 kg (154 lbs)														26
Seeding unit for	power ha	rrow	130								76 k	(g (16	7 lbs)	C	3905	27
Seeding unit for	power ha	rrow	150								90 k	(g (19	8 lbs)	C	3905	28
Compatibility	<u>~</u>	J _y ,	ďζ	<i>⇔</i> ,}	رى ئىڭ	δ,	√,'n	8/7	80,60	ďρ	10/	6.351	13/kg)	d is in	√2, <u>*</u>	< ₽
Model																

110 w/roller
130 w/roller
150 w/roller

150 w/roller

(*) C890025 adapter required

Very compatible

Compatible

Not compatible

POWER RAKE



FEATURES & BENEFITS

- Powerful and fast
- · Adjustable working depth
- Tiltable

The MultiOne power rake is the ideal tool for preparing the soil for planting.

Operating the power rake with the gauge wheels down puts the machine in the landscaping mode, conditioning and preparing the soil, creating an ideal bed for seeding. Operating the power rake with the gauge wheels up puts the machine in the tilling mode for more aggressive soil preparation. It is manually tiltable to the right (17°) and to the left (21°)

Since the power rake does not require a lot of power, even the smaller machines work well with this unit.

Note: suggested floating boom valve on machine.

Model		Wi	dth			Wh	neels I	Heigh	t		\	Neigh	t			Code	
135	1:	35 cm	(53.1	in)		0 - 8	cm (0	- 3.1	in)		250 k	(g (55	1 lbs)		C8	9068	35
155	1	155 cm	า (61 iı	n)		0 - 8	cm (0	- 3.1	in)		290 k	(g (64	0 lbs)		C8	9068	36
Compatibility		155 cm (61 in)				かグゲ	کئ	√°.	8,4	80.K	ďρ	2/2	6.351	13.KS)	d रेट्टी	√2, [*]	€1
Model																	
135																	
155																	
(*) C890025 adapter requi	red							Ver	, compati	ble		Compa	atible		Not	compatib	le


STONE BURIER



FEATURES & BENEFITS

- Professional, efficient stone burier
- Top grade finish in just one pass
- Can be equipped with seeding unit ready lawn surface in a single pass

A professional hydraulic stone burier for preparation of lawn beds. The stone burier mills the soil, buries eventual stones and other objects up to 150 mm depth in a single pass, making a milled and tamped topsoil. Working depth is adjustable with

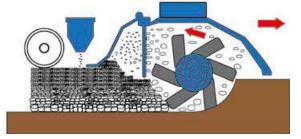

the rear field roller. With the optional seeding unit you are able to make a ready lawn surface on one pass. Stone burier is most commonly used when the topsoil needs to be milled thoroughly.

Note: suggested floating boom valve on machine.

	•															
Model	Worki	ng wid	dth	٧	Vorkir	ng de	pth		Blade	es		Weig	ht		Code	
114 w/roller	114 cn	า (44.9	in)	0	- 15 c	m (0-	6 in)		36		298	kg (65	57 lbs)	C	3905	23
132 w/roller	132 c	m (52	in)	0	- 15 c	m (0-	6 in)		42		335	kg (73	39 lbs)	C	3905	24
150 w/roller	150 с	m (59	in)	0	- 15 c	m (0-	6 in)		48		380	kg (83	38 lbs)	C	3905	25
Options																
Seeding unit for s	stonebur	ier 11	4								70 k	(g (15	4 lbs)	C	3905	29
Seeding unit for s	stonebur	ier 13	2					76 k	(g (16	7 lbs)	C	3905	30			
Seeding unit for s	stonebur	ier 15	0								90 k	(g (19	B lbs)	C	3905	31
Compatibility	1.	<u>ئ</u> ي	N.	<i>⇔</i> .}⁄	^{ري} رن	6,3	√,5	8 [,] A	80, E	ďp	107	6.351	13 Kg	d is so	√5,¥	€1
Model																
114 w/roller																
132 w/roller																
150 w/roller				,												
(*) C890025 adapter required							Very	compati	ible		Compa	atible		Not	compatib	ole

POWER PLOW



FEATURES & BENEFITS

- The corkscrew action of the blades pulls the plough through the ground
- The soil is discharged on the right hand side
- The horizontal digging action causes little or no hardpan

The MultiOne power plow can effortlessly dig into all types of soil, even hardened, rock-filled dirt that has never been broken. The rotary plow works well in areas with existing sod. It chops and buries the grass and roots and does not tangle easily.

This rotary plow is a powerful and effective method of preparing your soil for planting, and can work effectively in tight working areas, such as next to sidewalks, curbs, and other buildings. The power plow sticks out of the right side of the machine.

The blades once worn out are replaceable.

Model	Max Wo	rking [epth		Max \	Vorki	ng Wi	dth		١	Veigh	t		1	Code	
Power Plow	25 cr	n (9.8 i	n)		35	cm (1	3.8 in			93 k	g (205	lbs)		C8	9124	1 0
Compatibility					<i>₹</i> 0,√.)	<i>ې.</i>	√°.	8/7	8,4	dp	2/1	6351	13/30	والجام	12.K	<₽
(*) C890025 adapter require	ed						Very	compati	ble		Compa	atible		Not	l compatib	le

SWING STUMP GRINDER



FEATURES & BENEFITS

- Excellent visibility of the cutting area
- · Cuts large stumps without repositioning
- Replaceable teeth
- Equipped with a rubber cover prevents wood waste from flying on the around.

The hydraulically powered stump grinder is a necessary tool for landscaping and forestry work. This unit hydraulically sweeps side to side effectively grinding the stump as deeply under ground as needed. It is equipped with a hydraulic oscillation system that moves the disc to the right and left to mill large logs.

The stump grinder is safely controlled from the MultiOne's operator's seat. The solid steel cutter wheel and heavy duty replaceable teeth assure long lasting cutting performance. The stump grinder is also equipped with mechanical support legs which lift it off the ground for storage.

Model		S	lewing	gang	le		Te	eth			Wei	ight			Code	
Swing Stump Grinde	r		±4	.0°			1	8		10)7 kg (236 lk	os)	C	3905	17
Compatibility	√ .	<u>ئ</u> ي	ďΣ	⟨ ²),	<i>و</i> ي رئي	<u>ئ</u> ي.	رئې	8,4	80,0	dp	201	6.351	1390	d स्था	1.X	♦
(*) C890025 adapter required							Very	compati	ible		Compa	atible		Not	compatib	le

STUMP GRINDER



FEATURES & BENEFITS

- Cuts large stumps quickly
- Carbide-Tipped Teeth
- Excellent visibility of the cutting area
- Replaceable teeth
- Equipped with a rubber cover prevents wood waste from flying on the around.

Designed for maximum operating capability, the stump grinder mounts directly to the front of a MultiOne for easy maneuvering in tight areas and positioning exactly where grinding action is needed. Mounted at a 90-degree angle to the operator, the stump grinder offers increased visibility to the cutting area, giving the operator the same wide view as with any pull-behind grinder.


The stump grinder is the ideal attachment for landscaping contractors, homeowners with acreage, campus facilities, municipalities, and rental contractors.

Stumps are eliminated even more quickly when used with machines equipped with high flow hydraulics.

The solid steel cutter wheel and replaceable carbide-tipped teeth efficiently rip through hard wood, providing long life and uptime protection for the attachment.

Model			7	eeth					We	eight				Co	ode	
Stump Grinder				24				1	165 kg	(364	lbs)			C89	0516	•
Compatibility	\\\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.\.	1, 3, 83 P.S. P.S. P.S. P.S.					رئ	8,4	80,0	ďρ	10/	6,351	13.KS)	displ	IJ,	♦
(*) C890025 adapter required							Ver	y compai	tible		Comp	atible		Not	compatib	ole

FORESTRY MULCHER

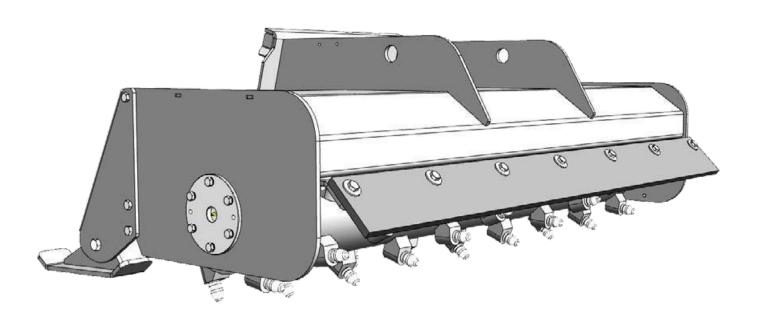

FEATURES & BENEFITS

- Heavy-duty soil conditioner crush smaller roots, tree stumps and branches as well as ice and hard compact ground
- Carbide cutting teeth

The MultiOne mulcher shows its versatility crushing forest residue, clearing land for site development, maintaining gravel roads, crushing ice, removing small roots and tree stumps as well.

Hydraulic motor is connected directly to eliminate transmission maintenance. The rotor is equipped with replaceable and cost effective carbide cutting teeth

Model		Width	1		tting eeth		Rote Wid			Rotor amete		We	ight		Cod	е
Forestry Mulcher 150		175 cn (68.9 ir			66		150 (59			10 cm 5.7 in			0 kg 0 lbs)	C	8909	970
Compatibility	√ .	کی	™ J	<i>4</i> 3.7	ري ري ي	<i>لې</i> ن	\rangle.	8,1	8,4	dp	12/	6.351	13, B	م بیجا	IJ,	♦
(*) C890025 adapter required							Very	compati	ble		Compa	atible		Not	compatib	ole


TIMBER GRAB



FEATURES & BENEFITS

- Available with hydraulic rotator or as freely rotating version
- Versatile attachment for transporting and loading of timber, branches, etc.
- Load holding valve
- Rotating grab allows transporting also lengthwise - makes it possible to pass through narrow places with long logs and facilitates work in dense forest

Timber grab is an attachment that allows you to grab tree trunks, branches, wood waste, kerb stones etc. and transport them both lengthwise and crosswise. This makes it possible to pass through narrow places also with long logs and enables loading on trailer or on a pile in any direction. It is equipped with a upper tooth bar to move the branches and a lower one that avoids the trunk swinging during transport. Timber grab is available either with a hydraulic rotator or as freely rotating version.

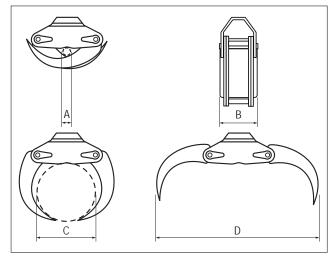

		Dimensi	ons (cm/in)	
Model	Α	В	С	D
100	6,5 / 2.6	31 / 12.2	41 / 16	100 / 39.4
120	8 / 3.1	36 / 14	45 /17.7	120 / 47

Model	Lifting Capacity*	Max Opening Length	Weight	Code
Timber grab 100	1000 kg (2204 lbs)	100 cm (39.4 in)	170 kg (375 lbs)	C890583
Timber grab 120	1500 kg (3037 lbs)	120 cm (47 in)	207 kg (456 lbs)	C890584
Timber grab 120 w/rotator	1500 kg (3037 lbs)	120 cm (47 in)	192 kg (423 lbs)	C890586
Pull bars (set of 2)	/	/	4 kg (9 lbs)	C890587

achine											l	ح		I	l
^ ?	گ .5	ďζ	⟨ ² ,}	رب ريزي	6,5	√ي.	8,14	0,00	ďρ	101	6.350	13/20	9/550	15 X	€1
	\?\	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	√, √3 KJ ^Q J _Q JJ	\'\'\'\'\'\'\'\\\\\\\\\\\\\\\\\\\\\\\\	\''\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	\(\frac{1}{3}\) \(\frac{1}{3}\	√, √3 Ky ←y ←y√y ←y √3 ←y ←y/y	1	√, √3 KJ ペ, ペ, √3 √3 %	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1, 13 KJ 63 63 63 69 642 00 67 636 18 68		

(*) C890025 adapter required Very compatible Compatible Not compatible

WINCH



FEATURES & BENEFITS

- Powerful and compact hydraulic winch
- Equipped 25 m (82 ft) of wire rope
- The operator can safely and easily control it from the operator's seat

The MultiOne hydraulic winch enables towing of all kinds of objects (e.g. logs, poles, boats) from places where you cannot drive with the machine.

The winch is equipped with a safety net, 25 m (82 ft) of wire rope and a towing hitch. It is powered by a powerful hydraulic motor and mounts on MultiOne's quick attach plate. Use of the winch is simple, one person can easily handle it. Auxiliary hydraulics control lever (or switch) is switched to continuous flow (locking position) from the driver's seat, which releases the wire drum so that the wire can be pulled out by hand. When the wire is attached to the desired object, operator returns to driver's seat and turns the auxiliary hydraulics lever (or switch) to opposite direction and the winch begins to reel in the rope.

The winch stops as soon as the auxiliary hydraulics control lever (or switch) is released.

Model	Cable I	Lengt	h	Pı	ılling	Force		Max	reeli	ng sp	eed		Weig	ght		Cod	е
Winch	25 m	(82 ft)		1000) kg (2	2204 lbs	s)	2,5	m/s	(8.2 ft	/s)	95	kg (2	10 lbs) (28912	210
Compatik				7 3	<i>₹</i> .	جېر <u>۲</u> کې	ρ.,	√.ÿ	8,4	80 C.	dp	70,7	6.351	13.KS)	aksil	IJ.,	₹
(*) C890025 adap	ter required							Very	compat	ible		Compa	atible		Not	compatib	le

TREE SHEAR



FEATURES & BENEFITS

- Powerful and safe tree shear
- Clean and precise cuts
- · Excellent tool for forest thinning, tree clearance etc.
- · Thanks to the strong grapple the tree is easy to take away
- Available with hydraulic or fixed blade

The MultiOne tree shear is an efficient and useful tree cutter, intended for forest thinning, tree clearance and similar jobs where smaller trees need to be cut. The strong grapple takes a firm grip of the tree trunk and the cutting blade cuts the trunk. The tree is then easy and fast to move away with MultiOne.



Two models are available: with fixed blade for trunk up to 10 cm diameter and with hydraulic blade for trunk up to 15 cm diameter. Through the reach of the MultiOne's boom, this unit can also be used to prune branches, and clear scrub growth in difficult to reach places.

Model		Ø	Max I	Limb		M	lax Op	pening	3		We	eight			Code	е
Hydraulic Blade		15	cm (5	.9 in)		50) cm (19.7 ir	1)	3	80 kg	(838 l	bs)	C	8910)71
Fixed Blade		10	cm (3	.9 in)		60) cm (2	23.6 ir	1)	2	00 kg	(441 l	bs)	С	8910	70
Compatibility	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	1, 3, My PJ PJ				6,3	√.ÿ.	8,4	80'i	ďρ	27	6.351	13,150	9/350	5,₹	<1 €1
Model																
Hydraulic Blade																
Fixed Blade																
(*) C890025 adapter required				·			Ver	compati	ble		Compa	atible	·	Not	compatib	le

LOG GRAPPLE



FEATURES & BENEFITS

- Useful attachment for fencing and forest work
- Independent arms operated by two cylinders
- Strong log grab, also for more professional and frequent log handling
- Heavy duty design allows grabbing of bigger tree trunks as well

The heavy duty MultiOne log grapple is a very powerful and flexible tool used to securely grab, lift, and transport harvested logs. The hydraulically powered grapple arms firmly grip the logs, securing them to the lower forks. The design of the grapple accommodates small logs to large tree trunks. Thanks to the high lifting capacity of the MultiOne machines, it is possible to perform forest work and to load trucks or trailers, even in inaccessible hard-to-reach areas.

Model	\	Nidth	1		Teeth	n lengt	th	Ор	ening	g Angl	е	'	Weigl	ht		Cod	е
Log grapple	100 c	m (39	.4 in)	1	01 cn	n (39.8	in)		68	}°		120	kg (26	55 lbs)		2890	580
Compatibility				NJ.	<i>₹</i>).	<i>جېځ</i> ځ	رن رن	√3;	8 ^j A	80.K	ďρ	2/2	6351	1399	diszl	12.X	€Ì
(*) C890025 adapter requ								Very	compati	ible		Compa	atible		Not	compatib	le

LOG SPLITTER



FEATURES & BENEFITS

- Powerful (7 ton) and safe log splitter
- Max. log diameter 400 mm

The hydraulically powered MultiOne log splitter allows you to safely and quickly split cut logs into firewood.

The wedge, driven by a powerful hydraulic cylinder, allows to split the log in two pieces or in four pieces with the optional tool. The wedge travel is adjustable to avoid downtime.

It is equipped with a large adjustable support table (three positions: high 83 cm / 32.7 in, medium 59 cm / 23.2 in and low 35 cm / 13.8 in). With a power of 7 ton it is able to split log up to 40 cm diameter.

There are two control levers which have to be activated with both hands for increased safety.

It is equipped with wheels for transport and can also be moved manually using the handle.

Model	Power Wedge Stroke M		Max log diameter Max log height					Weight				Code					
Log splitter	7 ton	5	5 cm (21.6 ir	1)	40 cm	(15.7	in)	100 d	cm (39	.4 in)	110	110 kg (242 lbs)			C890570	
Compatibility	y	\\.\.	ک _ن ی	NJ.	₹ 3.7	, 2,7°	<i>%</i>	رن ب	8,4	80 to	ďρ	10/	5.51 D.5.51	13.KD (disell	√5/ _¥	₹.
(*) C890025 adapter req	uired							Ven	/ compati	hle		Compa	ıtihle		Not	compatib	le le

DUMPER



FEATURES & BENEFITS

- Cost effective
- High capacity

The MultiOne dumper is a very useful tool used to collect, transport, store, and empty waste. There are two sizes, a 200 l (7 cu ft) unit, and the larger 400 l (14 cu ft). Each of these units can stand on its own when detached from the MultiOne, and easily dumped by the machine when full. The smaller model can be easily unloaded by lifting the machine boom, while the larger model is equipped with a front side that can be open with a lever.

Model	Capacity*	Width	Length	Height	Weight	Code
200	200 l (7 ft ³)	95 cm (37.4 in)	90 cm (35.4 in)	51 cm (20 in)	60 kg (132 lbs)	C890280
400	400 l (14 ft ³)	97,5 cm (38.4 in)	132 cm (52 in)	83 cm (32.7 in)	97 kg (214 lbs)	C890285

^(*) verify the lifting capacity of the machine

					(3)				- (2		<i>\o</i>		3	-0	.*	
Compatibility	^ ?	₹.,	N.D	⟨5 ² }	ر ⁷ ن	P.5	√,5	8,4	0,30	dp	1/1	6.550	13/20	طنجي	15 V	€1
Model																
200																
400																

(*) C890025 adapter required Very compatible Compatible Not compatible

HYDRAULIC BIO SHREDDER



FEATURES & BENEFITS

- Compact dimensions
- Excellent tool for chipping branches and small tree trunks
- Manual feeding and discharge chute rotation
- · Equipped with safety stop system
- Foldable for easy transport

The hydraulically powered chipper/shredder is a powerful tool for quickly reducing a pile of brush, garden waste, and tree limbs to reusable shredded mulch. Combined with the MultiOne, this chipper/shredder can work in areas not reachable with a traditional towed chipper.

The machines design incorporates a feed roller that pulls the branches up to 90 mm (3.5 in) diameter into the chipper section in a controlled, safe speed. The chips are then processed by the shredder section, reducing the wood chips to mulch. The operator remains safely out of the way during the chipping/shredding process.

Model					Max timber diameter					Weight					Code		
Hydraulic bio shred	der				9 cm (3.5 in) 210 kg (463 lbs) C89073						730						
Compatibility	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	J ₃	Ν̈́λ	<i>₹</i> 3.}⁄	^{ري} رن	6,5	√.ÿ	8,1	80,0	dp	12/	6,351	13/Kg)	displ	1. N.	♦	
(*) C890025 adapter required						Very	compati	ble	e Compatible				Not compatible				

SIDE SHIFT ADAPTER




FEATURES & BENEFITS


- Makes it possible to mount the attachment 60 cm (24 in) shifted to the right from the centerline
- Mounts between the attachment and the quick attach plate of the loader

The MultiOne side shift adapter is a simple and strong accessory that is mounted between the attachment and the machine quick attach plate. In this way it is possible to mount the attachment shifted to the right by 60 cm (24 in). It is very useful when, for example, you have to cut grass with a flail mower along the edge of a road.

		Dime	nsions	
	Α	В	С	D
cm	60	127	27	24
in	23.6	49.8	10.8	9.3

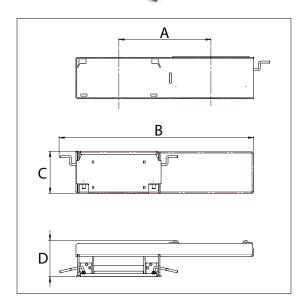

Model	Side Shift	Max Load*	Weight	Code
Side Shift Adapter	60 cm (23.6 in)	1000 kg (2204 lbs)	60 kg (133 lbs)	C890910
(*) verify the lifting capacity of the machine		-	·	



(*) C890025 adapter required Very compatible Compatible Not compatible

TILT ADAPTER



FEATURES & BENEFITS


- Makes it possible to tilt the attachment sideways and e.g. grade the ground with a bucket or leveller, or load pallets on uneven ground with pallet fork
- Mounts between the attachment and the guick attach plate of the loader


MultiOne tilt adapter is mounted between the attachment and the loader's attachment coupling plate. With it the attachment can be tilted sideways, and makes it possible to:

- Make different forms to the ground with a bucket or leveller
- Keep pallet fork level when you are driving on surfaces with gradient
- Load pallets that are on uneven ground
- Level ground on uneven surfaces

Tilt adapter with max. 14,5 degree tilting in both directions. It is ideal for buckets, leveller and pallet fork - for jobs where tilting is a must but the tilting angle doesn't have to be big

The tilt adapter is intended mainly for nonhydraulically operated

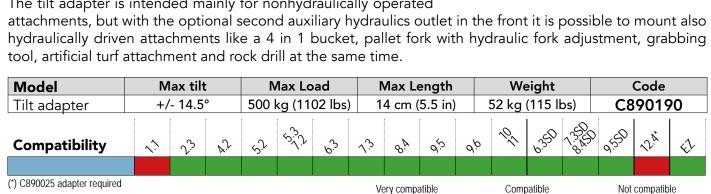

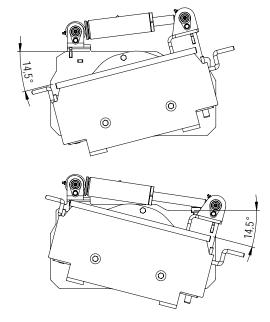

ATTACHMENT ROTATOR



FEATURES & BENEFITS

- 360° rotation
- Mounts between the attachment and the quick attach plate of the loader

The attachment rotator is designed for a 360°, smooth, continuous motion in both directions. The attachment rotator is commonly used in many jobs for inverting and dumping loads.

Like the tilt adapters, the attachment rotator mounts between the attachment and the loader's attachment coupling plate. It is equipped with a hydraulic motor and a slewing ring that allow the 360° rotation. Maximum load capacity is 1.200 kg. The rotator attachment coupling plate is 255 mm further away from the machines's attachment coupling plate.

The tilt adapter is intended mainly for non-hydraulically operated attachments, but with the optional second auxiliary hydraulics outlet on the loader it is possible to use with hydraulically driven attachments also like a 4 in 1 bucket, pallet fork with hydraulic fork adjustment, grabbing tool, etc.. at the same time.

Model	Max tilt				Max Load					Weight				Code		
Attachment rotator			360°			120	0 kg (2	2645 ll	os)		73 kg	(161	lbs)	(C890	960
Compatibility	√.`	J.,	ΚĴ	45	<i>جېڅ</i> ځ	6,3	√3.	8/4	di	ďρ	102	6351	13/19	d is sol	15.X	♦
(*) C890025 adapter required							Ve	ery compa	atible		Comp	oatible		Not	compatib	ole